

Quantitative flood hazard assessment methods: A review

Andrea Maranzoni | Marco D'Oria | Carmine Rizzo

Department of Engineering and Architecture, University of Parma, Parma, Italy

Correspondence

Andrea Maranzoni, Department of Engineering and Architecture, University of Parma, Parco Area delle Scienze 181/A, 43124 Parma, Italy.

Email: andrea.maranzoni@unipr.it

Funding information

Italian Ministry of University and Research, Grant/Award Number: 2017T4JC5K

Abstract

Flood hazard assessment is a fundamental step in flood risk mapping. Quantitative assessment requires hydrodynamic modelling of the flooding process in order to calculate the spatial distribution of suitable flood hazard indicators representative of flooding intensity and frequency, hence its potential to result in harm. Flood hazard indicators are usually defined by combining relevant flooding parameters, mainly flood depth and flow velocity, but also flooding arrival time, flooding duration, sediment or contamination load, and so forth. A flood hazard classification is commonly introduced to assign a hazard level to areas potentially subject to flooding. This article presents a systematic review of quantitative methods proposed in the scientific literature or prescribed by government authorities to assess the hazard associated with natural or anthropic flooding. Flood hazard classification methods are listed and compared by specifying their underlying approach (heuristic, conceptual, empirical), the exposed element which they were designed for (people, buildings, vehicles, etc.), and their fields of application (river overflow, dam-break, levee breach, debris flow). Perspectives and future challenges in quantitative flood hazard analysis are also discussed. This review aims to help modellers and practitioners to select the most suitable flood hazard assessment method for the case study of interest.

KEY WORDS

flood hazard assessment, flood hazard mapping, flood inundation modelling, flood risk management, hazard index, hazard rating

1 | INTRODUCTION

Inundations are among the most destructive disasters, with the potential to create dramatically negative impact on populations in terms of fatality, injury, displacement of people, and damage to infrastructure, cultural and environmental heritage, and economic activities (CRED-UNDRR, 2020; Doocy et al., 2013). Flooding can be induced by natural phenomena (such as river floods

causing overflow or breaching of river embankments, coastal storms, tides, or intense rainfall in urban areas), or anthropic causes (such as incorrect operations of hydraulic structures, or uncontrolled release of water resulting from an accident, or the partial or total collapse of a dam). Over the last 20 years, floods have been the most recurrent type of natural disaster (accounting for 44% of all events recorded by CRED's Emergency Events Database during this period) and affected 1.65 billion

This is an open access article under the terms of the [Creative Commons Attribution License](#), which permits use, distribution and reproduction in any medium, provided the original work is properly cited.

© 2022 The Authors. *Journal of Flood Risk Management* published by Chartered Institution of Water and Environmental Management and John Wiley & Sons Ltd.

people worldwide (the highest figure compared to the other disaster types), with \$651 billion in economic losses (CRED-UNDRR, 2020).

Flooding creates a risk when anthropic and environmental systems can be potentially damaged. According to the EU Floods Directive (European Council, 2007), flood risk is defined as “the combination of the probability of a flood event and of the potential adverse consequences to human health, the environment and economic activity associated with a flood”. In analogy with the standard definition of risk of extreme events, flood risk is to be considered as the combination of three components (IPCC, 2012; Kron, 2002): flood hazard (i.e., flood frequency and severity); exposure (i.e., the presence of people, buildings, infrastructure, economic and social activities in floodable areas); and vulnerability (i.e., the propensity of exposed elements to be damaged by flooding). The increase in human settlements and economic assets in floodplains and coastal areas, along with the alteration in flood magnitude and frequency due to climate change, leads to a higher degree of flood risk (Hirabayashi et al., 2013), thus highlighting the need to adopt national and local risk reduction and adaptation strategies to improve the resilience of communities to the negative impacts of floods (Hammond et al., 2015; Nofal & van de Lindt, 2022).

Flood risk mapping is an effective, increasingly used tool in the risk-based approach to flood risk management (Sayers et al., 2013). Flood risk maps visualise the spatial distribution of flood risk, expressed in terms of expected damage and potential consequences for a given flooding event (Merz et al., 2007), and are essential to plan a prompt response to emergencies, prevent occurrence of new risks (by orienting land-use planning and land management), reduce existing risks (through the implementation of protection and mitigation measures), and increase public awareness of flood risk, thereby fostering the adaptation of society to changing risk factors (Martini & Loat, 2007).

On an international level, there exist many examples of flood mapping for purposes of flood risk management (de Moel et al., 2009; Klijn et al., 2008). Among these, the U.S. National Flood Insurance Program (NFIP, 2021; Luke et al., 2018); the French Flood Risk Prevention Plan (Decree 2019-715, 2019; Guillier, 2017); the Flood Risk Management Plan of the Rhine, Germany (ICPR, 2021); the Danube Flood Risk Management Plan (ICPDR, 2021); the plan PLUIES (Flood prevention and control and effects of floods on victims) in Wallonia, Belgium (PLUIES, 2003); the DREAM and UP DREAM programs in the Philippines (Santillan et al., 2016; UP DREAM, 2016); the recent update of hazard and flood risk maps for several thousand kilometres of river courses

and coastal sectors in Spain (Olcina-Cantos & Díez-Herrero, 2021). The EU Floods Directive (European Council, 2007) requires member states to produce flood hazard and risk maps as a preparatory step to the development of flood risk management plans (de Moel et al., 2009).

Catalogues of interactive flood maps or databases are often made available on websites as a result of national flood mapping programs (e.g., Environment Agency, 2019; Géorisques, 2020; HORA, 2022; UmweltAtlas, 2022). Flood inundation maps for selected return periods are published in these online resources, thereby providing a flood hazard zonation based on flooding probability. Furthermore, various reports, guidelines and handbooks have been produced with the purpose of guiding flood risk assessment and management, typically targeted to a specific geographic area (e.g., CHARIM, 2021; Díez-Herrero et al., 2009; ESCAP, 1991; FEMA, 2013; FEMA, 2021; INTEGEMS, 2017; LAWA, 2006; Lumbroso et al., 2008; National Research Council, 2009; NSWG, 2005; The Mekong River Commission Secretariat, 2009), or offering an overview of the techniques used in different countries across the world (e.g., Prinos, 2008; Ranzi et al., 2011; van Alphen & Passchier, 2007). Recently, several national and international research programs have been devoted to investigating extreme flood events and promoting advances in methods, strategies, and flood simulation techniques to enhance flood risk management (e.g., FloodRISE: UCI, 2022; FLOODsite: FLOODsite, 2009 and Samuels et al., 2009; KULTURisk: KULTURisk, 2011; IMPACT: Morris & Hassan, 2005).

Flood hazard is defined as the threat represented by a flood of certain frequency and magnitude to a particular location (de Moel et al., 2015; Nofal & van de Lindt, 2022); it is a key component of flood risk and can be evaluated via qualitative, semi-quantitative, or quantitative methods (Chen et al., 2015). Qualitative methods are heuristic and solely based on expert judgement. Semi-quantitative methods are based on the concept of ranking flood hazard by weighting the contributions of different geographic and morphometric factors. Typically, they exploit the potential of GIS (e.g., Albano et al., 2014; Albano et al., 2019; Araújo et al., 2019; Bathrellos et al., 2016; Bhat et al., 2019; Chen et al., 2015; Islam & Sado, 2000; Kittipongvises et al., 2020; Kourgialas & Karatzas, 2011; Kumar, 2016; Skilodimou et al., 2021; Toosi et al., 2019), and are very efficient, especially in large-scale (regional or basin-scale) analysis, or in situations characterised by scarcity of data. Finally, quantitative methods are based on hydrological scenarios and hydraulic modelling, and imply the definition and calculation of a suitable flood hazard index to be referred to in order to draw up a hazard level classification. Flood

hazard indexes are usually defined by combining relevant flow parameters; therefore, applying such methods requires setting up complex hydrodynamic models and having a large number of input data available (elevation models, land use and cover data, etc.). In addition, a great computational effort is needed, especially when a large floodable area must be covered, and high accuracy and spatial resolution must be guaranteed (Banks et al., 2014). Figure 1 illustrates the main steps of quantitative flood hazard assessment. The hydrodynamic inundation model, usually based on the two-dimensional shallow water equations (FEMA, 2020; Mudashiru et al., 2021; Néelz & Pender, 2009; Teng et al., 2017), provides a physically based description of the flooding process for selected scenarios and allows predicting the relevant hydraulic parameters needed to characterise flooding intensity. The flooding parameters mostly used to quantify flood hazard are flood depth (FEMA, 2013; Martini & Loat, 2007; Merz et al., 2007; National Research Council, 2009) and flow velocity (Kreibich et al., 2009), taken separately or in combination to define a suitable flood hazard indicator (often, the product of flood depth and flow velocity; e.g., AIDR, 2017; Merz et al., 2007). In particular, flood depth is the most used intensity parameter in flood damage functions (Hammond et al., 2015; Merz et al., 2010; Nofal & van de Lindt, 2022). Other parameters relevant to flooding hazard assessment are flood arrival time, flood duration, flood depth rise rate (Ahmadisharaf et al., 2015; de Bruijn et al., 2015; FEMA, 2013; Merz et al., 2007; Muñoz et al., 2020; Naeem et al., 2021; Santillan et al., 2016; Vu & Ranzi, 2017), as well as standing water depth following the flood, erosive potential of the flooding (Luke et al., 2018), and debris or contaminant load.

Typical outcomes of quantitative flood hazard assessment are inundation and flood hazard maps (Figure 1), which depict the extent of the areas potentially subject to flooding and the spatial distribution of the flood hazard, respectively, for a selected hydrological scenario (Carrasco et al., 2012; de Moel et al., 2009; Merz et al., 2007; van Alphen & Passchier, 2007). However, lack of standardisation can be observed in flood hazard mapping (de Moel et al., 2009; van Alphen et al., 2009; van Alphen & Passchier, 2007). Probabilistic approaches have recently been proposed, which, unlike deterministic ones, provide information about the uncertainty associated with flood hazard predictions (e.g., Beven et al., 2015; Di Baldassarre et al., 2010; D’Oria et al., 2019; Vorogushyn et al., 2010).

This article systematically reviews existing quantitative flood hazard assessment methods either prescribed by national government authorities or developed by academic institutions during research

programs, with a special focus on the criteria proposed for flood hazard level classification. Despite recent valuable efforts to provide critical reviews on various aspects of flood risk modelling (e.g., Cea & Costabile, 2022; Moreira et al., 2021), a comprehensive review on quantitative flood hazard assessment methods is still missing in the literature. Stability conditions for people and vehicles are not considered here since they identify two possible states only (i.e., safe/unsafe) without introducing an actual classification in different flooding hazard levels. Besides, extensive reviews of these stability conditions are already available, for both people (Jonkman & Penning-Rosell, 2008; Xia et al., 2014) and vehicles (Bocanegra et al., 2020; Martínez-Gomariz et al., 2018; Shah et al., 2021), often with particular reference to urban flooding (Mignot & Dewals, 2022).

The methods reviewed here are categorised in terms of basic approach (heuristic, conceptual, empirical); exposed element (people, buildings, vehicles); and field of application (riverine or coastal flooding, dam-break, levee breach, debris flow, etc.). For each method, the indicator used to express flood hazard is specified along with the parameters involved.

Therefore, the present review aims to:

- a. offer an overview of the state of art in quantitative flood hazard assessment by presenting an updated list of quantitative methods currently used for flood hazard ranking and mapping based on hydrodynamic modelling;
- b. describe the main characteristics of these methods in terms of basic approach, jeopardised elements, and application fields;
- c. help practitioners and modellers to identify the most suitable flood hazard ranking method for the application of interest by providing essential information to compare the different classification methods and evaluate their potential and limitations;
- d. provide relevant references in which the flood hazard ranking methods are proposed, analysed, or applied;
- e. discuss present issues and future challenges in quantitative flood hazard assessment;
- f. serve as an essential basis for the development of new and improved flood hazard assessment methods.

2 | STATE OF THE ART ON QUANTITATIVE FLOOD HAZARD ASSESSMENT METHODS

The quantitative flood hazard methods retrieved during the literature review are divided into two main categories

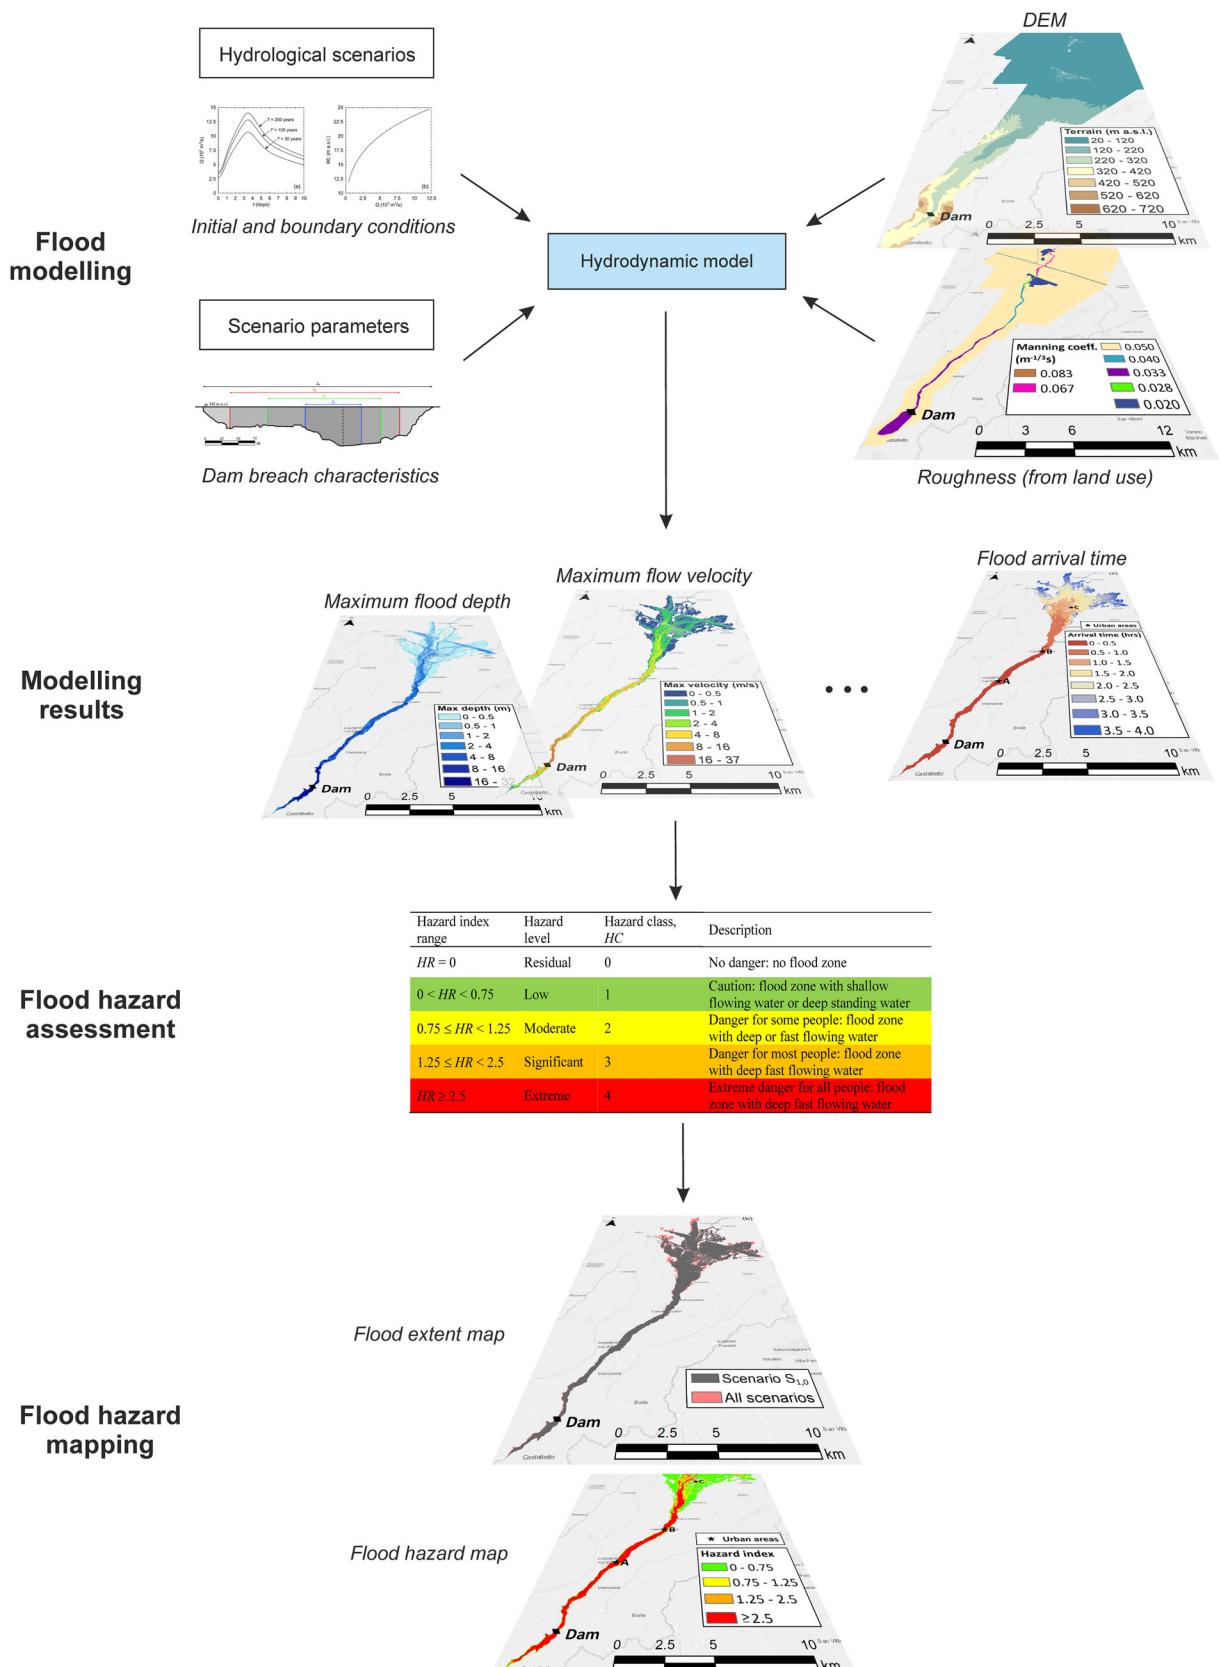


FIGURE 1 Conceptual framework for flood hazard assessment in a quantitative method. The example refers to a dam-break

and listed in two distinct tables. Table 1 shows the methods based on flood intensity only, which do not explicitly include information on frequency of flooding in

the flood hazard classification. The resulting hazard maps represent the spatial distribution of the hazard index for a specific flood event (historical or synthetic). Table 2

TABLE 1 Methods available in the literature for flood hazard assessment: Methods based on flood intensity only

(1) No.	(2) Institution/ country	(3) References	(4) Approach	(5) Variables involved	(6) Flood hazard indicators	(7) Flood hazard classification	(8) Exposed elements	(9) Applications
1	ACER, USA	ACER (1988)	Empirical	Flood depth h , flow velocity v	h, v (graphical depth-velocity relationships)	Graphical partition (depending on the jeopardised element): Low danger zone Judgement zone High danger zone	People, houses on foundation, mobile homes, passenger, vehicles	Flooding (D Baldassarre et al., 2008; Musolino et al., 2020); levee breach (Mazzoleni et al., 2014); dam-break (Ahmadifaraf et al., 2013)
2	N/A	Abt et al. (1989)	Empirical	Flood depth h , flow velocity v , mass of person m_p , height of a person h_p	v_h $v_h < f(m_p, h_p)$ $v_h < 0.929[\exp(0.01927m_p h_p+ 1.088)]^2$	Manoeuvrability and stability condition: Low danger zone Judgement zone High danger zone	People (adults)	Flooding
3	Ministry of Environment, Spain	Ministerio de Medio Ambiente (1996)	Heuristic	Flood depth h , flow velocity v	h, v (graphical depth-velocity relationships)	Graphical partition of the $h-v$ plane (different for urban and rural areas): Low danger zone Judgement zone High danger zone	N/A	Dam-break (Musolino et al., 2020)
4	France	MATE-METL (1999)	Heuristic	Flood depth h	h	Low or Medium: $h < 1$ m High: $h \geq 1$ m	N/A	Flooding
5	France	MATE-METL (1999)	Heuristic	Flood depth h , flow velocity v	h, v	Hazard matrix, in which four hazard levels are defined (very high, high, medium, low) as a combination of: Three flood depth classes: $h < 0.5$ m $0.5 \text{ m} \leq h < 1$ m $h \geq 1$ m	N/A	Flooding (flash flood)
6	RESODAM Project (Development of rescue actions based on dam- break flood analysis)	Karvonen et al. (2000)	Empirical	Flood depth h , flow velocity v , mass of a person m_p , height of a person h_p	v_h	Three flow velocity classes: Low: $v < 0.2$ m/s Medium: $0.2 \text{ m/s} \leq v < 0.5 \text{ m/s}$ High: $v \geq 0.5 \text{ m/s}$	Manoeuvrability and stability condition: $v_h < f(m_p, h_p)$ (being a function of flow and environmental conditions: good, normal, poor, v_h in m^2/s , m_p in kg, and h_p in m)	Flooding (in urban areas; Xia et al., 2011); dam-break (Xia et al., 2011)

(Continues)

TABLE 1 (Continued)

(1) No.	(2) Institution/ country	(3) References	(4) Approach	(5) Variables involved	(6) Flood hazard indicators	(7) Flood hazard classification	(8) Exposed elements	(9) Applications
7	Finland; ISPRRA, Italy	Maijala (2001), Clausen and Clark (1990), ISPRRA (2012)	Empirical	Flood depth h , flow velocity v	vh, v	Damage classification based on the building type: - Not anchored wooden buildings - Partial damage: $vh \geq 2 \text{ m}^2/\text{s}$ - Anchored wooden buildings - Total damage: $vh \geq 3 \text{ m}^2/\text{s}$ - Concrete and masonry buildings - Inundation damage: $v < 2 \text{ m/s}$ and $vh < 3 \text{ m}^2/\text{s}$ (Clausen & Clark, 1990) - Partial damage: $v \geq 2 \text{ m/s}$ and $vh \geq 3 \text{ m}^2/\text{s}$ - Total damage: $v \geq 2 \text{ m/s}$ and $vh \geq 7 \text{ m}^2/\text{s}$	Buildings	Flooding; dam-break (Clausen & Clark, 1990)
8	N/A	Aleotti et al. (2004)	Heuristic	Flood depth h , flow velocity v	h, v	Very low: $h < 0.25 \text{ m}$ and $v < 0.25 \text{ m/s}$ Low: $(0.25 \text{ m} \leq h < 0.5 \text{ m}$ and $v < 0.5 \text{ m/s})$ or $(h \leq 0.25 \text{ m}$ and $0.25 \text{ m/s} \leq v < 0.5 \text{ m/s})$ Medium: $(0.5 \text{ m} \leq h < 1 \text{ m}$ and $v < 1 \text{ m/s})$ or $(h \leq 0.5 \text{ m}$ and $0.5 \text{ m/s} \leq v < 1 \text{ m/s})$ High: $h \geq 1 \text{ m}$ or $v \geq 1 \text{ m/s}$	Buildings	Flooding in alluvial fans; Aleotti et al., 2004
9	N/A	Penning-Roswell et al. (2005), DEFRA Environment Agency (2006a)	Heuristic	Flood depth h , flow velocity v , debris flow parameter DF	$HR = h(v + 1.5) + DF$ $DF = 0, 1, 2$ (depending on the probability that debris will lead to a significant greater hazard: 0 — unlikely; 1 — possible; 2 — likely)	Very high: $HR \geq 10$ High: $7 < HR < 10$ Medium/Low: $HR < 7$	People	Flooding Penning-Roswell et al., 2005
10	N/A	Tingsanchali and Karim (2005)	Empirical	Flood depth h , flooding duration d	h, d	Based on flood intensity: Low: $h < 0.6 \text{ m}$ (0.8 m) Medium: $0.6 \leq h < 1 \text{ m}$ High: $1 \text{ m} < h < 3.5 \text{ m}$ Very high: $h > 3.5 \text{ m}$ Based also (qualitatively) on flood duration: Low: Short duration Medium: Medium duration High: Long duration	N/A	Flooding Shrestha & Lohpasankrit, 2017; Tansar et al., 2020; Tingsanchali & Karim, 2010
11	DEFRA, UK	Wade et al. (2005), DEFRA Environment Agency (2006a), DEFRA Environment Agency (2006b)	Empirical	Flood depth h , flow velocity v , debris flow parameter DF	$HR = h(v + 0.5) + DF$ $DF = 0, 0.5, 1$ (depending on the probability that debris will lead to a significant greater hazard)	Low: $HR < 0.75$ Moderate: $0.75 \leq HR < 1.25$ Significant: $1.25 \leq HR < 2.5$ Extreme: $HR \geq 2.5$	People	Flooding Kvočka et al., 2016; Kvočka et al., 2018; Musolino et al., 2020; Levee breach (D'Oria et al., 2019; Mazzoleni et al., 2014)

TABLE 1 (Continued)

(1) No.	(2) Institution/ country	(3) References	(4) Approach	(5) Variables involved	(6) Flood hazard indicators	(7) Flood hazard classification	(8) Exposed elements	(9) Applications
12	N/A	van Alphen and Passchier (2007), Luke et al. (2018)	Heuristic	Flood depth h	h	Classification based on flood depth in relation to a human body scale (van Alphen & Passchier, 2007); Dark blue: ankle-deep Light blue: knee-deep Light rose: hip-deep Orange: head-deep	People	Flooding (Luke et al., 2018; Sanders et al., 2020; van Alphen & Passchier, 2007); levee breach (Mazzoleni et al., 2014)
13	N/A	Aureli et al. (2008)	Heuristic	Flood depth h , Froude number Fr	Total depth $D = h(1 + 2Fr^2)^{1/2}$	Low: $D < 0.5$ Medium: $0.5 \leq D < 1$ High: $1 \leq D < 1.5$ Very high: $D \geq 1.5$	N/A	Flooding; levee breach (Ferrari et al., 2019; Ferrari et al., 2020); dam-break (Aureli et al., 2008)
14	N/A	Cançado et al. (2008)	Heuristic	Flood depth h , flow velocity v	h, v	Low: $0.1 m < h < 0.5 m$ and $0.1 m/s < v < 0.5 m/s$ Medium: $0.5 m < h < 1.5 m$ or $0.5 m/s < v < 1.5 m/s$ High: $h > 1.5 m$ or $v > 1.5 m/s$	N/A	Flooding (in urban areas; Cançado et al., 2008; Hurtado-Pidal et al., 2020)
15	Environmental Assessment Agency, Netherlands	Pieterse et al. (2009)	Heuristic	Flood depth h , arrival time t_a	h, t_a	Hazard matrix in which nine hazard levels are defined as a combination of three water depth classes (shallow, intermediate, deep) and three flood arrival time classes (slow, intermediate, rapid)	N/A	Flooding; levee breach (de Brujin et al., 2015)
16	Australian Government	Cox et al. (2010)	Empirical	Flood depth h , flow velocity v	h, v, vh	Different classifications (in four hazard classes) depending on the type of person (infants, children, adults). For example, for adults: for $h < 1.2 m$ and $v < 3 m/s$. Low: $vh < 0.4 m^2/s$ Moderate: $0.6 < vh < 0.8 m^2/s$ Significant: $0.8 < vh < 1.2 m^2/s$ Extreme: $vh > 1.2 m^2/s$; otherwise: Extreme	People (infants, children, and adults)	Flooding (Musolino et al., 2020; Smith et al., 2014)
17	Australian Government	Shand et al. (2011), Smith et al. (2014)	Empirical	Flood depth h , flow velocity v	h, v, vh	Different stability conditions depending on the vehicle type (small or large or 4WD)	Vehicles	Flooding

(Continues)

TABLE 1 (Continued)

(1) No.	(2) Institution/ country	(3) References	(4) Approach	(5) Variables involved	(6) Flood hazard indicators	(7) Flood hazard classification	(8) Exposed elements	(9) Applications
18	N/A	Xia et al. (2011)	Conceptual/ empirical	Flood velocity U , critical velocity U_c $HD = \min(1; U/U_c)$	Degree of hazard $HD \rightarrow 0$: element safe $HD \rightarrow 1$: element in danger	$HD \rightarrow 0$: element safe $HD \rightarrow 1$: element in danger	People, vehicles	Flooding (in urban areas; Xia et al., 2011); dam-break (Xia et al., 2011)
19	N/A	Masood and Takeuchi (2012)	Heuristic	Flood depth h	Hazard index H (ranging from 0 to 5)	$H = 0$: $h = 0$ m $H = 1$: $0 \leq h < 1$ m $H = 2$: $1 \leq h < 2$ m $H = 3$: $2 \leq h < 3$ m $H = 4$: $3 \leq h < 4$ m $H = 5$: $h \geq 4$ m	N/A	Flooding (Masood & Takeuchi, 2012)
20	National Disaster Management Authority, Pakistan; National Weather Service, USA	ERG (2013), NDMA (2016)	Heuristic	Flood depth h	h	Hazard zone 1 (Low): $h < 3$ ft (≈ 1 m)	N/A	Flooding (Farooq et al., 2019 [with a reclassification of the hazard zones]; Longenecker et al., 2020)
21	N/A	Russo et al. (2013)	Empirical	Flood depth h , flow velocity v	h, v	$h > 9$ ft (≈ 3 m) (in NDMA, 2016, calculated for $T = 10, 25, 50$, and 100 years)	For $0.09 \text{ m} < h < 0.16 \text{ m}$: High: $v \geq 1.58 \text{ m/s}$ Moderate: $1.5 \text{ m/s} \leq v < 1.88 \text{ m/s}$ Low: $v < 1.5 \text{ m/s}$	Pedestrians (in flooded streets)
22	N/A	Mani et al. (2014)	Empirical	Flood depth h , flow velocity v , flooding duration d	h, vh, d	Very low: $h < 0.2$ m and $vh < 0.3 \text{ m}^2/\text{s}$ and $d < 50$ h Low: $0 < h < 0.2$ m and $0 < vh < 0.3 \text{ m}^2/\text{s}$ and $d > 50$ h Low: $0.2 \text{ m} < h < 0.6$ m or $0.3 \text{ m}^2/\text{s} < vh < 0.7 \text{ m}^2/\text{s}$ and $0 < d < 25$ h Medium: $0.2 \text{ m} < h < 0.6$ m or $0.3 \text{ m}^2/\text{s} < vh < 0.7 \text{ m}^2/\text{s}$ and $d > 25$ h Medium: $0.6 \text{ m} < h < 1.5$ m or $0.7 \text{ m}^2/\text{s} < vh < 1.2 \text{ m}^2/\text{s}$ and $0 < d < 25$ h High: $1.5 \text{ m} < h < 3.5$ m or $1.2 \text{ m}^2/\text{s} < vh < 1.6 \text{ m}^2/\text{s}$ and $d > 25$ h Very high: $1.5 \text{ m} < h < 3.5$ m or $1.2 \text{ m}^2/\text{s} < vh < 1.6 \text{ m}^2/\text{s}$ and $d > 25$ h Very high: $h > 3.5$ m or $vh > 1.2 \text{ m}^2/\text{s}$ and $d > 0$	Flooding (Garrote et al., 2021)	

TABLE 1 (Continued)

(1) No.	(2) Institution/ country	(3) References	(4) Approach	(5) Variables involved	(6) Flood hazard indicators	(7) Flood hazard classification	(8) Exposed elements	(9) Applications
23	N/A	Mani et al. (2014)	Empirical	Flood depth h , flow velocity v , flooding duration d	h, vh, d	Flood hazard classification based on flood variables considered individually:	N/A	Flooding
				h	Very low: $h < 0.2$ m Low: $0.2 \text{ m} < h < 0.6$ m Medium: $0.6 \text{ m} < h < 1.5$ m High: $1.5 \text{ m} < h < 3.5$ m Very high: $h > 3.5$ m			
				vh	Very low: $vh < 0.3 \text{ m}^2/\text{s}$ Low: $0.3 \text{ m}^2/\text{s} < vh < 0.7 \text{ m}^2/\text{s}$ Medium: $0.7 \text{ m}^2/\text{s} < vh < 1.2 \text{ m}^2/\text{s}$ High: $1.2 \text{ m}^2/\text{s} < vh < 1.6 \text{ m}^2/\text{s}$ Very high: $vh > 1.6 \text{ m}^2/\text{s}$			
				d	Very low: $d < 25$ h Low: $25 \text{ h} < d < 50$ h Medium: $50 \text{ h} < d < 100$ h High: $100 \text{ h} < d < 175$ h Very high: $d > 175$ h			
24	Australian Government	Smith et al. (2014)	Empirical	Flood depth h , flow velocity v	h, v, vh	H1: $vh \leq 0.3 \text{ m}^2/\text{s}$ and $h < 0.3$ m and $v < 2 \text{ m}/\text{s}$ H2: $(vh \leq 0.6 \text{ m}^2/\text{s})$ and $h < 0.5$ m and $v < 2 \text{ m}/\text{s} \setminus H1$ H3: $(vh \leq 0.6 \text{ m}^2/\text{s})$ and $h < 1.2$ m and $v < 2 \text{ m}/\text{s} \setminus H2$ H4: $(vh \leq 1 \text{ m}^2/\text{s})$ and $h < 2$ m and $v < 2 \text{ m}/\text{s} \setminus H3$ H5: $(vh \leq 4 \text{ m}^2/\text{s})$ and $h < 4$ m and $v < 4 \text{ m}/\text{s} \setminus H4$ H6: $vh > 4 \text{ m}^2/\text{s}$ or $h > 4$ m or $v > 4 \text{ m}/\text{s}$	People, vehicles, buildings	Flooding (AIDR, 2017; Costabile et al., 2020; Costabile et al., 2021); dam-break (Abdulrahman et al., 2022; CDSD, 2020)
25	Australian Government	Smith et al. (2014)	Empirical	Flood depth h , flow velocity v	h, v, vh	Different stability conditions depending on the building type	Buildings	Flooding
26	Ministry of Land, Infrastructure and Transport, Japan; Korea	MILIT (2015), Lee et al. (2019), Ujdimal et al. (2019)	Heuristic	Flood depth h	h	Very low: $h < 0.5$ m Low: $0.5 \text{ m} < h < 1$ m Medium: $1 \text{ m} < h < 2$ m High: $2 \text{ m} < h < 5$ m Extreme: $h > 5$ m	People (evacuation)	Flooding (Mihu-Pintile et al., 2019; Ongdas et al., 2020; Quiroga et al., 2016); levee breach (Kim et al., 2019)
27	N/A	Milanese et al. (2015)	Conceptual	Admissible flood depth h (function of flow velocity v), sliding depth h_s , toppling depth h_t , drowning depth h_d	$h = \min(h_k(v), h_t(v), h_d)$	Flood hazard classification into three classes (low, medium, high) based on two different stability thresholds for children and adults	People (children and adults)	Flooding (in flat and mountain areas and in the presence of debris)

(Continues)

TABLE 1 (Continued)

(1) No.	(2) Institution/ country	(3) References	(4) Approach	(5) Variables involved	(6) Flood hazard indicators	(7) Flood hazard classification	(8) Exposed elements	(9) Applications
28	N/A	Arrighi et al. (2016)	Empirical	Froude number Fr, height of the vehicle H_v , height of the planform h_c , car width l , car length L , water density ρ , car density ρ_c , flow orientation β	Mobility parameter $\theta_{vcv} \theta_V$ $\theta_V = f(H_v, h_c, l, L, \rho, \rho_c, \beta)$ $\theta_{vcv} = f(Fr^2)$	The (colour) scale of the parameter goes from 0.25 (very low hazard) up to 1.5 (very high hazard). Areas where $\theta_{vcv}, \theta_V = 1$ are those likely to be prone to incipient motion of vehicles (high hazard)	Vehicles	Flooding (Arrighi et al., 2016)
29	N/A	Kramer et al. (2016)	Empirical	Flood depth h , flow velocity v	Total head $H_t = h + v^2/(2g)$	For passenger cars: Low: $H_t \leq 0.3$ m Transition: $0.3 < H_t < 0.4$ m High: $H_t \geq 0.4$ m For emergency vehicles: Low: $H_t \leq 0.6$ m Transition: $0.6 < H_t < 0.7$ m High: $H_t \geq 0.7$ m	Vehicles	Flooding (in urban areas)
30	N/A	Kvočka et al. (2016)	Conceptual	Flow velocity v , toppling incipient velocity v_t , sliding incipient velocity v_s	$HR = \min[1, v/\min(v_t, v_s)]$	Low: $HR < 0.3$ Moderate: $0.3 \leq HR < 0.6$ Significant: $0.6 \leq HR < 1$ Extreme: $HR = 1$	People	Flooding (Kvočka et al., 2016)
31	N/A	Silvestro et al. (2016)	Empirical/ heuristic	Flood depth h , flow velocity v	h, v, vh	Low ($h < 0.2$ m and $vh < 1.35$ m ² /s) or ($0.2 < h \leq 0.5$ m and $v < 1$ m/s) Moderate: ($h < 0.5$ m and $vh > 1.35$ m ² /s) or ($0.2 < h \leq 0.5$ m and $v > 1$ m/s and $vh < 1.35$ m ² /s) or ($h > 0.5$ m and $vh < 1.35$ m ² /s) High: $h \geq 0.2$ m and $vh > 1.35$ m ² /s Very high: $vh \geq 5$ m ² /s and $v \geq 2$ m/s	People	Flooding (Silvestro et al., 2016)
32	Philippines	UP DREAM (2016)	Heuristic	Flood depth h	h	Low: $h \leq 0.5$ m Medium: $0.5 < h \leq 1.5$ m High: $h > 1.5$ m	N/A	Flooding (Santilan et al., 2016)
33	N/A	Vojtek and Vojtecková (2016)	Empirical	Flood depth h , flow velocity v	$FI = 0$ if $h = 0$ m $FI = h$ if $h > 0$ m and $v \leq 1$ m/s $FI = vh$ if $v > 1$ m/s	Low: $FI \leq 0.3$ Medium: $0.3 < FI \leq 1$ High: $FI > 1$	People, buildings	Flooding Vojtek & Vojtecková (2016)
34	N/A	Álvarez et al. (2017)	Heuristic	Flood depth h , flow velocity v	h, v, vh	Low: $h < 0.5$ m or $vh < 0.5$ m/s or $vh < 0.25$ m ² /s Medium: $0.5 \leq h \leq 1$ m or 0.5 m/s $\leq v \leq 1$ m/s or 0.25 m ² /s $\leq vh \leq 0.5$ m ² /s High: $h > 1$ m or $v > 1$ m/s or $vh > 0.5$ m ² /s	N/A	Dam-break (Álvarez et al., 2017)
35	N/A	Farid et al. (2017)	Heuristic	Flood depth h	h	Low: $h < 0.8$ m Moderate: $0.8 < h < 1.2$ m High: $h > 1.2$ m	N/A	Flooding (in urban areas; Farid et al., 2017)

TABLE 1 (Continued)

(1) No.	(2) Institution/ country	(3) References	(4) Approach	(5) Variables involved	(6) Flood hazard indicators	(7) Flood hazard classification	(8) Exposed elements	(9) Applications
36	Germany	Krieger et al. (2017)	Heuristic	Flood depth h	h	Low: $h < 0.1$ m Moderate: $0.1 \leq h < 0.3$ m High: $0.3 \leq h < 0.5$ m Very high: $h > 0.5$ m	Buildings	Flooding (in urban areas; Bhola et al., 2020)
37	Federal Ministry for Agriculture, Forestry, Environment and Water Management, Austria	Neuhold et al. (2018), van Alphen and Passchier (2007)	Heuristic	Flood depth h , flow velocity v	h, v	High hazard (red zone): $h > 1.5–0.5v$ [m/s] or $v > 2$ m/s Medium hazard (yellow zone): $h < 1.5–0.5v$ [m/s] and $v < 2$ m/s (calculated for the return period $T = 100$ years)	N/A	Flooding (van Alphen & Passchier, 2007)
38	Malaysia	Ghazali and Osman (2019)	Heuristic	Flood depth h	h	Low: $h < 0.5$ m Moderate: $0.5 \leq h \leq 1.2$ m High: $1.2 \leq h \leq 2.5$ m Very high: $h > 2.5$ m (calculated for $T = 5, 10, 20, 50$, and 100 years)	People	Flooding (Ghazali & Osman, 2019)
39	N/A	Khaing et al. (2019)	Heuristic	Flood depth h	h	Very low: $h \leq 0.2$ m Low: $0.2 < h \leq 0.5$ m Medium: $0.5 < h \leq 1$ m High: $1 < h \leq 2$ m Very high: $2 < h \leq 3$ m Extremely high: $h > 3$ m	N/A	Flooding (Khaing et al., 2019)
40	N/A	Patra et al. (2019)	Heuristic	Flood depth h , flow velocity v , time to peak t_p	h, v, t_p	Low: $h < 0.25$ m or $v < 0.2$ m/s or $t_p > 12$ h Medium: $0.25 \leq h < 1$ m or $0.2 \text{ m/s} \leq v < 0.8 \text{ m/s}$ or $6 \text{ h} < t_p \leq 12 \text{ h}$ High: $1 \text{ m} \leq h < 2 \text{ m}$ or $0.8 \text{ m/s} \leq v < 1.2 \text{ m/s}$ or $3 \text{ h} < t_p \leq 6 \text{ h}$ Very high: $2 \text{ m} \leq h < 5 \text{ m}$ or $1.2 \text{ m/s} \leq v < 2 \text{ m/s}$ or $1 \text{ h} < t_p \leq 3 \text{ h}$ Extreme: $h > 5 \text{ m}$ or $v > 2 \text{ m/s}$ or $t_p \leq 1 \text{ h}$	N/A	Dam-break (Patra et al., 2019)
41	N/A	Al Baky et al. (2020)	Heuristic	Flood depth h	h	Low: $h \leq 2$ m Medium: $2 \text{ m} < h \leq 4$ m High: $h > 4$ m (calculated for different return periods $T = 2.33, 10, 20, 50$, and 100 years)	N/A	Flooding (Al Baky et al., 2020)
42	N/A	Evans et al. (2020)	Heuristic	Flood depth h	h	Low: $h \leq 0.1$ m Medium: $0.1 \leq h < 0.3$ m High: $h \geq 0.3$ m	Vehicles, traffic flows	Flooding in urban areas (Evans et al., 2020; Padilano et al., 2021)

(Continues)

TABLE 1 (Continued)

(1) No.	(2) Institution/ country	(3) References	(4) Approach	(5) Variables involved	(6) Flood hazard indicators	(7) Flood hazard classification	(8) Exposed elements	(9) Applications
43	Kazakhstan	Ongdas et al. (2020)	Heuristic	Flood depth h , flow velocity v , flooding duration d	h, v, d	Low: $h < 1 \text{ m}$, $v < 0.01 \text{ m/s}$, $d < 5 \text{ h}$ Medium: $1 \text{ m} < h < 3 \text{ m}$, $0.01 \text{ m/s} < v < 0.05 \text{ m/s}$, $5 \text{ h} < d < 24 \text{ h}$ High: $3 \text{ m} < h < 5 \text{ m}$, $0.05 \text{ m/s} < v < 0.1 \text{ m/s}$, $24 \text{ h} < d < 72 \text{ h}$ Crisis: $5 \text{ m} < h < 7 \text{ m}$, $0.1 \text{ m/s} < v < 1 \text{ m/s}$, $72 \text{ h} < d < 120 \text{ h}$ Catastrophic: $h > 7 \text{ m}$, $v > 1 \text{ m/s}$, $d > 120 \text{ h}$	N/A	Flooding (Ongdas et al., 2020)
44	N/A	Liu et al. (2021)	Empirical	Flood depth h	h	Extremely low: $h \leq 0.3 \text{ m}$ Low: $0.3 \text{ m} < h \leq 0.5 \text{ m}$ Medium: $0.5 \text{ m} < h \leq 1 \text{ m}$ High: $1 \text{ m} < h \leq 3 \text{ m}$ Extremely high: $h > 3 \text{ m}$	People	Flooding (in urban areas; Liu et al., 2021)
45	N/A	Phakonkham et al. (2021)	Heuristic	Flood depth h	Hazard index H (ranging from 0 to 1 according to a h - H relationship)	Small ($H \leq 0.25$): $h \leq 0.3 \text{ m}$ Medium ($0.25 < H \leq 0.5$): $0.3 \text{ m} < h \leq 0.6 \text{ m}$ High ($0.5 < H \leq 0.75$): $0.6 \text{ m} < h \leq 2 \text{ m}$ Very high ($H > 0.75$): $h > 2 \text{ m}$	N/A	Flooding (Phakonkham et al., 2021)
46	N/A	Psomiadis et al. (2021)	Heuristic	Flood depth h , flow velocity v	vh	Low/Medium: $vh < 2.1 \text{ m}^2/\text{s}$ High: $2.1 \text{ m}^2/\text{s} \leq vh \leq 3 \text{ m}^2/\text{s}$ Very high: $vh > 3 \text{ m}^2/\text{s}$	N/A	Dam-break (Psomiadis et al., 2021)
47	N/A	Lazzarin et al. (2022)	Heuristic	Flood depth h , Froude number Fr	Impact parameter $W = (h/h_{ref})^\alpha \times (1 + \beta Fr^2)$ where h_{ref} : reference water depth; α and β : calibration factors Special cases (Kreibich et al., 2009): $\alpha = 1$ and $\beta = 0$: W expresses flow depth; $\alpha = 1$ and $\beta = 1/2$: W expresses energy head; $\alpha = 2$ and $\beta = 2$: W expresses flow force	N/A	People, vehicles, buildings	Flooding (Lazzarin et al., 2022)
48	N/A	Tingsanchali and Promping (2022)	Heuristic	Flood depth h , flow velocity v , flooding duration d	$FHI = \alpha FHI_d + \beta FHI_h$ where $FHI_d = 1 \text{ for } d \leq 60 \text{ h}$ $FHI_d = 2 \text{ for } 60 \text{ h} < d \leq 100 \text{ h}$ $FHI_d = 3 \text{ for } 100 \text{ h} < d \leq 120 \text{ h}$ $FHI_d = 4 \text{ for } 120 \text{ h} < d \leq 140 \text{ h}$ $FHI_d = 5 \text{ for } d > 140 \text{ h}$ $FHI_h = 1 \text{ for } h \leq 0.6 \text{ m}$	Very low: $FHI \leq 1$ Low: $1 < FHI \leq 2$ Medium: $2 < FHI \leq 3$ High: $3 < FHI \leq 4$ Very high: $4 < FHI \leq 5$	N/A	Flooding (in urban areas; Tingsanchali & Promping, 2022)

TABLE 1 (Continued)

(1) No.	(2) Institution/ country	(3) References	(4) Approach	(5) Variables involved	(6) Flood hazard indicators	(7) Flood hazard classification	(8) Exposed elements	(9) Applications
49	N/A	Garcia-Martinez and Lopez (2005)	Heuristic	Flood depth h , flow velocity v	h, vh	For flooding: Low: $0.1 \text{ m} < h < 0.5 \text{ m}$ and $vh < 0.5 \text{ m}^2/\text{s}$ Medium: $0.5 \text{ m} < h < 1.5 \text{ m}$ or $0.5 \text{ m}^2/\text{s} < vh < 1.5 \text{ m}^2/\text{s}$ High: $h > 1.5 \text{ m}$ or $vh > 1.5 \text{ m}^2/\text{s}$ For mud or debris flows: Low: $0.2 \text{ m} < h < 1 \text{ m}$ and $vh < 0.2 \text{ m}^2/\text{s}$ Medium: $0.2 \text{ m} < h < 1 \text{ m}$ and $0.2 \text{ m}^2/\text{s} < vh < 1 \text{ m}^2/\text{s}$ High: $h > 1 \text{ m}$ or $vh > 1 \text{ m}^2/\text{s}$	N/A	Mud or debris flow, flooding (Grena et al., 2018)
50	Icelandic Meteorological Office	Pagnoux and Roberts (2015)	Heuristic	Flood depth h , flow velocity v , debris and sediment load index l (= 0 or 1), water temperature index t (= 0 or 1)	h, vh, l, t	Extreme: $vh \geq 7 \text{ m}^2/\text{s}$ (or, when flow velocities are not known, $h > 6 \text{ m}$) High: $vh > 1.3 \text{ m}^2/\text{s}$ (or $h > 1 \text{ m}$) or $l = 1$ or $t = 1$ Moderate: $0.25 \text{ m}^2/\text{s} \leq vh \leq 1.3 \text{ m}^2/\text{s}$ (or $0.5 \text{ m} \leq h \leq 1 \text{ m}$) and $l = 0$ and $t = 0$ Low: $vh < 0.25 \text{ m}^2/\text{s}$ (or $h < 0.5 \text{ m}$)	N/A	Jökulhlaups (volcanogenic floods); Pagneux & Roberts, 2015

Note: N/A = not applicable; not available.

TABLE 2 Methods available in the literature for flood hazard assessment: Methods based on flood intensity and probability

(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)	(9)
Institution/ No. country	References	Approach	Variables involved	Flood hazard indicators	Flood hazard classification		Exposed elements	Applications
1 USACE, USA	USACE (1995)	Heuristic	Flood depth h , return period T	h, T	Primary flood hazard area: $h > 0$ for $T = 100$ years Secondary flood hazard area: outside		N/A	Riverine flooding
2 Po River Basin Authority, Italy	Po River Basin Authority (1999)	Heuristic	Flood depth h , flow velocity v , flow discharge Q , return period T	h, v, Q, T	Zone A: $h > 0$ for $T = 200$ years and $Q = 0.8Q_T = 200$; $v > 0.4 \text{ m/s}$ Zone B: ($h > 0$ for $T = 200$ years) \ Zone A Zone C: ($h > 0$ for $T = 500$ years) \ (Zone A \ Zone B)		N/A	Riverine flooding
3 Czech Republic	Befha (2000), Dráb and Ríha (2010)	Heuristic	Flood depth h , flow velocity v , return period T	$R = (0.3 + 1.35/Ip)$ with $Ip = 1 - e^{-1/T}$	Four flood hazard categories calculated for different return periods: $T(5, 20, 100, 500 \text{ years})$: High: $R \geq 0.1$ or $Ip \geq 2$ $Ip = h$ if $h > 0$ and Medium: $0.01 \leq R < 0.1$ Low: $R < 0.01$		N/A	Flooding (Kremesová, 2016)
4 South Africa (Vaal River)	Stephenson (2002)	Heuristic	Flood depth h , flow velocity v , return period T	$HRI = HI \times RI$ with HI (Hazard Index, ranging from 1 to 3) being a function of h, v and vh , and RI (Risk Index, ranging from 0 to 2) being a function of T	Matrix method, which defines six hazard classes ranging from 0 to 6		Buildings, vehicles, people	Flooding
5 Government of Wallonia, Belgium	PLUTES (2003)	Heuristic	Flood depth h , return period T (flow velocity v , flood duration d)	$h, T(v, d)$	Hazard matrix in which three hazard levels are defined (high, medium, low) as a combination of: Three submersion classes: Low: $h < 3 \text{ m}$ Medium: $0.3 \text{ m} \leq h < 1.3 \text{ m}$ High: $h \geq 1.3 \text{ m}$ Three flood recurrence classes: Frequent: $T = 25$ years Occasional: $T = 50$ years Rare: $T = 100$ years		N/A	Flooding (Beckers et al., 2013; van Alphen & Passchier, 2007)
6 Sicilian District Basin Authority, Italy	Sicilian Region (2004)	Heuristic	Flood depth h , return period T		Corrective factors are applied to intensity if $v > 1 \text{ m/s}$ or $d > 3 \text{ days}$ and to recurrence if flood defences are present		N/A	Flooding

TABLE 2 (Continued)

(1) Institution/ No. country	(2) References	(3) Approach	(4) Variables involved	(5) Flood hazard indicators	(6) Flood hazard indicators	(7) Flood hazard classification	(8) Exposed elements	(9) Applications
7 Adige River Basin Authority, Italy	Adige River Basin Authority (2005)	Heuristic	Flood depth h , flow velocity v , return period T	h, v, T	Four different classes (low, moderate, high, very high) according to the values attained by h and v calculated for different return periods T (30, 100, and 200 years)	N/A	Flooding; levee breach (Maranzoni et al., 2022)	
8 Germany	LAWA (2006)	Heuristic	Flood depth h , flow velocity v , return period T	h, v, T	Hazard matrix in which four hazard levels are defined (extreme, moderate, low, residual) as a combination of: Three flood magnitudes: - In flat areas: High: $h > 2$ m Medium: $0.5 \text{ m} < h < 2$ m Low: $h < 0.5$ m - In steep areas: High: $v > 2$ m/s Medium: $0.5 \text{ m/s} < v < 2$ m/s Low: $v < 0.5$ m/s Four flood probabilities: High: $T = 20$ years Medium: $20 < T < 100$ years Low: $T = 100$ years Residual: $T = 200$ years	N/A	Flooding	
9 Netherlands	van Alphen and Passchier (2007)	Heuristic	Flood depth h , return period T	HR	$HR = 0$ if $h < 1$ m $HR = 1$ if $h > 1$ m for $T = 4000$ years	N/A	Flooding (van Alphen & Passchier, 2007)	
10 Mosel Basin, Rheinland-Pfälz, Germany	van Alphen and Passchier (2007)	Heuristic	Flood depth h , flow velocity v , return period T	(h, v, T)	Hazard matrix in which four hazard levels are defined (high, moderate, low, residual) as a combination of: Three flood magnitudes: High, average, low Four flood frequencies: Frequent: $T = 50$ years Average: $T = 100$ years Rare: $T = 200$ years Residual: $T > 200$ years (extreme)	People, animals, property	Flooding (van Alphen & Passchier, 2007)	
11 Switzerland	Loat and Petrascheck (2008), Loat (2010)	Empirical	Flood depth h , flow velocity v , return period T	h, vh, T	Hazard matrix in which four hazard levels are defined (high, moderate, low, residual) as a combination of: Three flood magnitudes: High: $h > 2$ m or $vh > 2 \text{ m}^2/\text{s}$ Average: $0.5 \text{ m} < h < 2 \text{ m}$ or $0.5 \text{ m}^2/\text{s} < vh < 2 \text{ m}^2/\text{s}$ Low: $h < 0.5$ m or $vh < 0.5 \text{ m}^2/\text{s}$ Four flood frequencies: Frequent: $T < 30$ years Average: $30 < T < 100$ years Rare: $100 < T < 300$ years Residual: $T > 300$ years	People, animals	Flooding (Tieu et al., 2018; van Alphen & Passchier, 2007; Werren et al., 2016)	
12 Spanish Geological Survey	Díez-Herrero et al. (2009)	Heuristic	Flood depth h , flow velocity v , return period T	h, v, vh, T	High hazard zone: $h \geq 1$ m or $v \geq 1 \text{ m/s}$ or $vh \geq 0.5 \text{ m}^2/\text{s}$ ($T = 100$ years) Medium hazard zone: $h < 1$ m and $v < 1 \text{ m/s}$ and $vh < 0.5 \text{ m}^2/\text{s}$ ($T = 100$ years) Low hazard zones: $h \approx 0$ and $v \approx 0$ ($T = 500$ years)	People	Flooding	

(Continues)

TABLE 2 (Continued)

(1) No. country	(2) Institution/ country	(3)	(4)	(5)	(6)	(7)	(8)	(9)
	References	Approach	Variables involved	Flood hazard indicators	Flood hazard classification		Exposed elements	Applications
13 N/A	Aronica, Candela, et al. (2012)	Empirical	Flood depth h , flow velocity v , return period T	h, vh, T	Different hazard classes (H_1, H_2, H_3, H_4 , from low to high) depending on T (50, 100, and 300 years). Graphical partition based on: $h < 0.3$ m, $vh < 0.7$ m ² /s, $vh > 0.7$ m ² /s, $h > 1.5$ m	N/A	Flooding (Aronica, Franza, et al., 2012; Garrote et al., 2021)	
14 Netherlands	de Brujin et al. (2015)	Conceptual/heuristic	Flood depth h , flow velocity v , water level rise rate d_h (over the first 1.5 m), flood scenario probability P_e , evacuation fraction f_{euc} , flee fraction $f_{fleeing}$	FFH (flood fatality hazard)	$FFH = \sum P_i (1 - f_{euc})^i \left(\frac{1 - f_{fleeing}}{F_{D,i}} \right)^{F_{D,i}}$ $F_{D,i} = 1.65 \cdot vh \geq 7$ m ² /s and $v > 2$ m/s $F_D = \Phi_N(\ln(h) - 7.60)/2.75$ for $h < 2.1$ m or $d_h < 0.5$ m/h $F_D = \Phi_N[(\ln(h) - 1.46)/0.28]$ for $h > 2.1$ m and $d_h < 4.0$ m/h where Φ_N is the cumulative standard normal distribution function	People	Flooding; levee breach (de Brujin et al., 2015)	
15 Netherlands	de Brujin et al. (2015)	Conceptual/heuristic	Flood depth h , flood scenario probability P_i	FDH (flood damage hazard)	$FDH = \sum P_i V_{D,i}$ V_D is a (graphic) damage function of h depending on the type of building	Cultural heritage sites	Buildings, infrastructure	
16 Castile and León Region, Spain	Garrote et al. (2020)	Heuristic	Flood depth h , return period T	h, T	Hazard matrix in which six hazard levels are defined (extreme, high, medium-high, medium, medium-low, low) as a combination of: Flood type (flash/normal flood) and basin area (small/large basin) Four flood depth classes: $h < 0.9$ m $0.9 \leq h < 1.8$ m $1.8 \leq h \leq 3.6$ m $h > 3.6$ m	Three flood recurrence classes: Frequent: $T = 10$ years Average: $T = 100$ years Rare: $T = 500$ years	Flooding (Garrote et al., 2020)	
17 FEMA, USA	FEMA (2021)	Heuristic	Flood depth h , return period T	h, T	Zone A (areas of special flood hazards) $h > 0$ for $T = 100$ years in floodplains [Zones AO and AH: 0.3 m < $h < 0.9$ m for $T = 100$ years, for areas of ponding or sloping terrain, respectively] Zone B or X-shaded (areas of moderate flood hazards): $(h > 0$ for $T = 500$ years) Zone A Zone C or X-unshaded (areas of minimal flood hazards); outside Zones A and B	N/A	Flooding	
18 N/A	Efstratiadis et al. (2022)	Heuristic	Flood depth h , probability P , return period T	P , probability that at least one hydrologic event (in a selected design time) causes $h > 0.1$ m (under a fixed confidence limit) or Note: Zone A is named Zone V along coasts	N/A	Flooding (Efstratiadis et al., 2022)		

TABLE 2 (Continued)

(1) No. country	(2) Institution/ References	(3) Approach	(4) Variables involved	(5) Flood hazard indicators	(6) Flood hazard classification	(7)	(8)	(9)
19 Switzerland	Latellin (1997), Ratzzo et al. (2002), Loat and Petrascheck (2008)	Empirical	Depth of debris deposition h , debris flow velocity v , return period T	h, v, T	Hazard matrix in which four hazard levels are defined (high, moderate, low, residual) as a combination of: Three debris flow magnitudes: High: $h > 1 \text{ m}$ and $v > 1 \text{ m/s}$ Average: $h < 1 \text{ m}$ or $v < 1 \text{ m/s}$ Low: $h = 0$ Four debris flow frequencies: Frequent: $T < 30 \text{ years}$ Average: $30 < T < 100 \text{ years}$ Rare: $100 < T < 300 \text{ years}$ Residual: $T > 300 \text{ years}$		Debris flow (van Alphen & Passchier, 2007)	People, animals
20 N/A	Rickenmann (2005)	Empirical	Depth of debris deposition h , debris flow velocity v , return period T	h, v, T	Hazard matrix in which four hazard levels are defined (high, moderate, low, very low) as a combination of: Four debris flow magnitudes: High: $h > 1 \text{ m}$ or $v > 1.5 \text{ m/s}$ Medium: $h < 1 \text{ m}$ and $0.4 \text{ m/s} < v < 1 \text{ m/s}$ Low: $h < 0 \text{ m}$ and $v < 0.4 \text{ m/s}$ Non affected areas: $h = 0$ Three probability of occurrence: High, medium, low	N/A	Debris flow (Hürlimann et al., 2008)	
21 Andorra	Hürlimann et al. (2006)	Empirical	Depth of debris deposition h , debris flow velocity v , return period T	h, v, T	Hazard matrix in which four hazard levels are defined (high, moderate, low, very low) as a combination of: Four debris flow magnitudes: High: $h > 1 \text{ m}$ and $v > 1 \text{ m/s}$ (direct impact) Medium: $h < 1 \text{ m}$ or $v < 1 \text{ m/s}$ (direct impact) Low: indirect impact (after flow) Non affected areas: $h = 0$ Three probability of occurrence: High: $T < 40 \text{ years}$ Medium: $40 < T < 500 \text{ years}$ Low: $T > 500 \text{ years}$	N/A	Debris flow (Hürlimann et al., 2006)	
22 N/A	Aronica, Biondi, et al. (2012)	Heuristic	Flood depth h , flow velocity v , return period T	h, Σ, T	Hazard matrix in which four hazard levels are defined (H1: low; H2: medium; H3: high; H4: very high) as a combination of: Four event intensities: $h < 0.1 \text{ m}$ $\Sigma < 20 \text{ kPa}$ $20 \text{ kPa} < \Sigma < 35 \text{ kPa}$ $\Sigma > 35 \text{ kPa}$ ($\Sigma = \rho_m v^2 + 1/2 \rho_m g h^2$, where ρ_m is the density of the solid-liquid mixture)	N/A	Debris flow (Aronica, Biondi, et al., 2012)	

(Continues)

TABLE 2 (Continued)

(1) Institution/ No. country	(2) References	(3) Approach	(4) Variables involved	(5) Flood hazard indicators	(6) Flood hazard classification	(7)	(8) Exposed elements	(9) Applications
					Three probabilities: $T = 50$ years $T = 100$ years $T = 300$ years			

Note: N/A = not applicable; not available.

includes the methods that take into account probabilistic information (i.e., the return period of the flood event or the probability of the flooding scenario), as well as the intensity of flooding. In this case, the flooding hazard maps represent the spatial distribution of flood hazard assessed on the basis of intensity-probability matrices. The methods usually adopted for the identification of river hazard zones also belong to this category. In both tables, the methods are listed in chronological order.

The tables consist of nine columns.

Column 1 reports a progressive number for the reader's convenience.

Column 2 indicates which government authority or national guidelines prescribe or suggest the method; state-of-the-art methods proposed in academic research projects are labelled as "N/A".

Column 3 provides the fundamental references of each method, especially those where they were first proposed (if available).

In Column 4, the methods are classified according to the basic approach: (a) "heuristic", if the flood hazard classification is defined on the basis of the author's expertise, well-established local uses, or choices made in previous studies, without providing specific supporting reasons; (b) "conceptual", if the flood hazard classification is defined on the basis of theoretical stability models specifically designed for the exposed element considered; and (c) "empirical", if the flood hazard classification is defined on the basis of experimental data.

Column 5 lists the hydraulic parameters and flooding variables involved in the definition of the flood hazard indicator for each method considered.

The flood hazard index used to provide a quantitative measure of flood hazard is specified in Column 6, while the related flood hazard classification is detailed in Column 7. The complexity of the classification is mainly related to the number of flooding parameters involved and the inclusion of information on flood frequency.

The exposed elements considered with each method are specified in Column 8 (people, buildings, vehicles, etc.).

Finally, Column 9 reports the fields of application of the methods, along with some references in which the methods are applied to real cases. In this column, "flooding" indicates the application to generic inundation events having various causes (severe rainfall, river overflow, coastal storm); labels "levee breach" and "dam-break" indicate the application of the method to flooding caused by levee system- and dam-failure, respectively; "debris flow" indicates the application to debris flow events. Hazard assessment methods specifically proposed for debris flows are listed at the bottom of Tables 1 and 2.

TABLE 3 Data analysis of the flood hazard assessment methods listed in Tables 1 and 2

(1)	(2)	(3)	(4)
Data type	Item	Sample size ^a	Appearance rate (%)
Category	Intensity (Table 1)	50	69.4
	Intensity and probability (Table 2)	22	30.6
Flooding variables involved ^b	Water depth ^c	70	97.2
	Flow velocity ^c	49	68.1
	Return period/scenario probability	22	30.6
	Flooding duration	6	8.3
	Flooding arrival time	1	1.4
	Debris parameter	3	4.2
	Others	8	11.1
Exposed element ^d	Not specified	38	52.8
	People (adults or children) ^e	24	33.3
	Animals	3	4.2
	Vehicles	9	12.5
	Buildings	10	13.9
	Others	4	5.6
Application ^f	Flooding (general)/river overflow	62	86.1
	Levee breach	9	12.5
	Dam-break	10	13.9
	Debris/mud flow	5	6.9
	Others	1	1.4
Approach	Heuristic	42	61.1
	Conceptual	2	2.8
	Empirical	22	30.6
	Mixed	4	5.5

^aThe methods analysed are $N = 72$.

^bSome methods use several flow variables.

^cThe product of water depth and flow velocity is used in 29.2% of cases; flood depth only is used as representative of flood hazard in 18.1% of cases.

^dSome methods are applied to different exposed elements.

^eThe methods designed specifically for people are 20.8% of the sample considered.

^fSome methods are used in different applications.

3 | DISCUSSION

The present review shows that a large number of quantitative flood hazard assessment methods have been proposed in the past decades and are currently in use. These methods differ in many respects, including the basic approach (heuristic, conceptual, or empirical), the indicator used to assess flood hazard, and details on flood hazard ranking. Table 3 reports some statistics regarding the entire set of methods listed in Tables 1 and 2.

Most of these methods (i.e., the 50 listed in Table 1 out of 72 total, approximately 7 out of 10) are based on estimating the hazard through flooding intensity only, generally referring to a specific (extreme or historical)

flood scenario or fixed hydrological events with selected return periods. Accordingly, the same flooding hazard indicator and classification are used regardless of the exceedance probability of the potentially hazardous flood event. Fewer methods (i.e., the 22 listed in Table 2 out of 72 total, approximately 3 out of 10) combine flooding intensity and flood exceedance probability. For example, Aronica, Candela, et al. (2012) used distinct hazard level classifications for hydrologic events of different return periods so that, for a given flooding magnitude, the hazard level is higher for more frequent flood events. Therefore, including flooding probability in hazard assessment enables different consideration of a potentially damaging situation (i.e., more tolerable or less tolerable) depending

on its probability of occurrence. Methods that use intensity-probability matrices are based on a similar concept and are very popular (e.g., LAWA, 2006; PLUIES, 2003; Stephenson, 2002) due to the simplicity of visualisation and application. An alternative effective method of combining inundation intensity and probability is based on defining the hazard classes through conditions set on flooding hazard indexes calculated for flood scenarios of different return periods (Adige River Basin Authority, 2005). Accordingly, a univocal hazard level can be attributed to a fixed location while starting from flood events of different return periods.

Tables 1 and 2 show that various flooding hazard indicators are currently used in the literature and in practical applications by scientists and practitioners. The most used is flood depth, followed by flow velocity, because these parameters reasonably have the greatest influence on flooding consequences (e.g., Merz et al., 2007). Indeed, flood depth is involved in defining flood hazard in almost all cases in Tables 1 and 2 (except items 18 and 30 in Table 1), either alone as representative itself of flood hazard (in approximately 18% of cases), or in combination with flow velocity or other relevant flooding parameters. Meaningful indexes representative of inundation intensity are obtained by combining flood depth and flow velocity. Among these, the most used is the product of flood depth and flow velocity, which is involved in almost 30% of the flood hazard assessment methods considered. Other basic hydraulic quantities are sometimes used as flood hazard indicators, namely energy head (e.g., Kramer et al., 2016) and total flow momentum, expressed as hydrostatically equivalent total depth (Aureli et al., 2008). Besides flood depth and flow velocity, other flooding quantities are rarely considered in flooding hazard assessment, despite their potential impact on the safety of people and the resilience of buildings and infrastructure. These quantities are mainly flooding arrival time (Pieterse et al., 2009), flooding duration (e.g., Mani et al., 2014; Ongdas et al., 2020; Tingsanchali & Promping, 2022), and other factors, such as turbidity (e.g., DEFRA Environment Agency, 2006b). The possible transport of floating objects (e.g., large wood debris) or pollutants is normally disregarded. National authorities in charge of soil defence from flooding and water resource management often identify distinct riverine hazard zones on the basis of the areas that are prone to flooding as a result of flood events of selected return periods (e.g., FEMA, 2021; Po River Basin Authority, 1999). According to this approach, flooding hazard is expressed by means of selected classes of inundation probability or, equivalently, through the probability of exceedance of a selected threshold flood depth (Efstratiadis et al., 2022).

Quantitative flood hazard classifications are commonly tailored to specific elements at risk, such as people (e.g., DEFRA Environment Agency, 2006b; Liu et al., 2021; Xia et al., 2011), vehicles (e.g., Shand et al., 2011; Xia et al., 2011), or buildings (e.g., de Bruijn et al., 2015; Krieger et al., 2017; Maijala, 2001), sometimes accompanied by a qualitative description of the hazardous implications expected (e.g., García-Martínez & López, 2005; Priest et al., 2009; Wade et al., 2005) and by recommendations on planning limitations and protection measures (e.g., Beffa, 2000). Garrote et al. (2020) even proposed a specific hazard ranking for cultural heritage sites. The graphical hazard classification by ACER (1988) changes depending on the jeopardised element (people, houses, vehicles, etc.). The hazard classification for people by Cox et al. (2010) is differentiated according to age (infants, children, adults), while the hazard categories defined by Kramer et al. (2016) for vehicles differ for passenger cars and emergency vehicles. It is indeed reasonable that the hazard level, which provides a concise interpretation of the flooding information in terms of potential hazard, is tailored to the exposed element. For instance, a given flooding intensity (expressed, e.g., in terms of water depth) can be very hazardous for a person and much less damaging for a building. On the other hand, other methods provide a general evaluation of the flooding hazard in an anthropised area (e.g., an urban area, as in Cançado et al., 2008 and in Tingsanchali & Promping, 2022), with no reference to specific elements at risk (e.g., Smith et al., 2014). Most of the methods considered in this review (about 1 out of 2) belong to this category. Hazard classes can be defined either mathematically (e.g., DEFRA Environment Agency, 2006b; Khaing et al., 2019; Mani et al., 2014; Patra et al., 2019) or graphically (e.g., ACER, 1988; Aronica, Candela, et al., 2012; Ministerio de Medio Ambiente, 1996) through conditions set on relevant flooding variables.

Most of the hazard assessment methods reviewed (approximately 86% of the total) are applied indifferently to flooding phenomena, regardless of their causes, and hence their use can be found in multiple contexts in the literature. For example, the flood hazard classification methods by ACER (1988) and DEFRA Environment Agency (2006b) have been applied to riverine and coastal flooding, as well as to levee breach flooding; the method by Loat (2010) has been applied to both flooding and landslides. On the other hand, some methods have been specifically proposed for a certain flood disaster, such as dam-break (e.g., Ministerio de Medio Ambiente, 1996; Patra et al., 2019) or debris flow (e.g., Loat & Petrascheck, 2008; Rickenmann, 2005). In this case, specific flood intensity parameters and hazard

categorizations suitable for the particular hazardous process are used (e.g., Aronica, Biondi, et al., 2012).

Finally, Table 3 shows that the approach used to derive most of the quantitative methods considered (about 61%) is heuristic — that is, the selection of the hazard indicator and the classification adopted are not soundly motivated theoretically or empirically; rather they are based on the expert judgement of the practitioner/modeller or, more simply, on previous studies (Rufat et al., 2015). The remaining methods derive from the analysis of experimental data (in approximately 31% of cases), conceptual models (in approximately 3% of cases), or mixed approaches (in approximately 5% of cases; see items 18 and 31 in Table 1, or items 14 and 15 in Table 2).

The critical review in this article highlights issues and challenges that still need to be addressed and deserve future research.

- a. The definition of a hazard indicator and the associated hazard ranking, as well as the definition of a flood hazard matrix in matrix-based methods, is often tailored to a specific case study and based on expert (subjective) judgement. In addition, different flooding hazard classifications are adopted by government authorities, even in the same country. This lack of standardisation on an international (but also national) scale appears obvious when considering the various geographical, environmental, and socio-economic contexts in which flooding can occur, the variety of assets potentially threatened by floods, and the different aims of flood hazard assessments. However, having unified and standardised hazard assessment methods would favour their transferability to different contexts, and allow for a consistent quantitative comparison of flooding hazard assessments performed in different regions of the world. It is worth considering the convenience to directing efforts towards standardisation of flooding hazard assessment. In this regard, the simplest methods, based on an intuitive and physically based hazard index, appear more suitable for wide and shared use, despite the trade-off with the requirement (discussed in the following point) that the hazard index is sufficiently representative. In addition, a standard format of flood hazard maps (including graphical elements, symbols, colours, etc.) is desirable (e.g., see the recommendations by FEMA, 2013).
- b. The flooding hazard indicator and the associated hazard classification ought to be suitably chosen according to the ultimate aim of the flood hazard assessment: spatial planning, emergency management and people evacuation, structural safety of constructions or infrastructures, protection of threatened

assets, and so forth (de Bruijn et al., 2015). The methods currently in use mainly consider flood depth as the primary flood hazard indicator regardless of the aim of the hazard assessment, yet additional flooding parameters might be relevant in specific application contexts. For example, in emergency management, flooding arrival and duration times also play a crucial role since they provide information about the time available for people evacuation and the time that evacuated people need to stay away from home. Moreover, flooding duration time is perhaps the main parameter for estimating potential damages to flooded agricultural and production areas (Förster et al., 2008). Water temperature instead is a relevant factor in volcanogenic floods (Pagneux & Roberts, 2015). A current challenge is to improve flood hazard assessment by introducing new empirical or physically based representative flood hazard indicators that take into account all relevant flooding parameters for the application of interest (Lazzarin et al., 2022; Tingsanchali & Promping, 2022).

- c. Flood hazard can be highly variable during the stages of a flooding event due to its unsteady character (Xia et al., 2011). The usual choice of considering the local maximum value attained by the hazard indicator (e.g., Santillan et al., 2016) allows a conservative hazard estimation, especially suitable for very rapid flood events. However, for long flooding events, the temporal aspect becomes relevant in flood hazard assessment, as for social vulnerability (Rufat et al., 2015). For this reason, the choice of flood hazard indicator could change depending on the temporal phases of the flooding. For example, in the pre-flood phase (preparedness), flooding arrival time and flood frequency can be assumed as the most significant flood hazard parameters; in the during-flood phase (response), flood intensity (e.g., flood depth) is the key flooding quantity, along with flood rise ratio; finally, the post-flood phase (recovery) is mainly characterised by flooding duration time and long-term flood depth. However, including unsteadiness in flood hazard assessments would require providing hazard maps for the different stages of the flood event, thereby making the communication of flood hazard to public, practitioners, and stakeholders more complex and likely less effective.
- d. Flood hazard must be considered a dynamic variable due to the non-stationarity of inundation events (Tsakiris, 2014). Indeed, climate change (Shrestha & Lohpaisankrit, 2017; Toosi et al., 2020) and the reduction in natural water retention due to modified land use are increasing the recurrence, magnitude, and spatial extent of flood events (IPCC, 2012; Kundzewicz et al., 2018), and consequently the

likelihood of adverse impacts (Blöschl et al., 2019). Accordingly, possible future climate scenarios and changes in hydrological regimes and land cover and use are being increasingly accommodated in risk management studies (e.g., Phakonkham et al., 2021) in order to estimate future changes in flood hazard and prioritise areas where protection and risk reduction measures are required. This is particularly challenging in urban areas, where growing wealth and the increasing presence of strategic assets can exacerbate the impact of floods (Padulano et al., 2021; Skougaard Kaspersen et al., 2017). Caution must be exerted in these projections due to the complex impact of climate change on flood hazard and the considerable uncertainty associated, especially on the regional or local scale (Kundzewicz et al., 2018).

- e. Flooding hazard is commonly categorised into classes and identified using qualitative attributes, such as “very high”, “high”, “moderate”, “low” and “very low”, or similar (also depending on the number of hazard classes considered). Such classifications are typically heuristic since they are based on the proposer’s judgement and experience. An exhaustive explanation of the meaning and implications of the different flood hazard classes is unfortunately rarely provided (e.g., Beffa, 2000; Priest et al., 2009; Wade et al., 2005). A detailed description of the practical implications of an event of a given hazard level for the elements at risk ought to be added, especially for those heuristic methods that are not oriented to specific exposed elements. A more objective hazard assessment is ensured by physically based (conceptual or experimental) approaches. In this regard, data obtained from laboratory experiments or collected after real-field events are important to understand the potentially damaging effects of flooding events of a given magnitude on exposed elements.
- f. The literature review has revealed a general lack of validation of the flood hazard methods against real case studies. It would be desirable to assess and compare the predictive capabilities of different hazard classifications against benchmarks, mainly to verify if hazard (and risk) assessments are accurate enough to allow practitioners and decision-makers to reach a confident decision. To enable this, rich, high-quality databases on observed distributed hazard parameters and flooding consequences of well-documented real events ought to be made available and easily accessible. Unfortunately, few flood hazard data are actually available because flood parameters are difficult to measure and collect during or after an actual flooding event (Molinari et al., 2019). New recent opportunities to collect data that can support validation and calibration of flood hazard models are provided by satellite or

airborne remote sensing, crowd sourcing, and footage from security cameras (Bates, 2004; Molinari et al., 2019; Rosser et al., 2017).

- g. Flood hazard assessment is affected by uncertainties, both aleatory and epistemic, from many different sources (Beven et al., 2015; de Moel et al., 2015; Merwade et al., 2008), and information on these uncertainties would be desirable. Probabilistic hazard maps are very useful to this end, and to address the problem of lack of flood hazard model validation (Aronica, Franzia, et al., 2012; Efstratiadis et al., 2022; Garrote et al., 2021; Maranzoni et al., 2022) since they are based on a multiplicity of flooding scenarios with different likelihood, unlike deterministic maps, which are based on a single (worst) scenario. In particular, probabilistic flood hazard maps illustrate the spatial distribution of the probability of the hazard levels considered (D’Oria et al., 2019), thereby providing information about the uncertainty associated with the occurrence of a given flood hazard level. Probabilistic maps can hence ensure a sufficiently concise and clear representation of flood hazard along with the associated uncertainty, the knowledge of which can support more informed decision-making strategies (Efstratiadis et al., 2022). However, validating probabilistic models is still a challenging task (Environment Agency, 2021; Molinari et al., 2019).
- h. When considering homogeneous methods (i.e., based on the same approach or referring to the same jeopardised element), *a priori* none seems better than another, especially among the heuristic ones. Indeed, the lack of flood hazard model validation does not grant full awareness of the limitations of the models. Different methods could therefore be used in the same study to estimate the sensitivity of the predicted flood hazard level with respect to the classification method adopted. It is, however, worth noting that some of the methods listed in Table 1 are very similar, differing in minor details only, such as the thresholds used to separate the hazard classes (e.g., compare items 9 and 11, or items 26 and 44 in Table 1).
- i. Effective communication of flooding hazard contributes to raising public awareness and forming a correct perception of flood hazard in floodable areas (Correia et al., 1998), thereby reducing social vulnerability, and consequently positively modifying the resilience and adaptive capacity of communities (IPCC, 2012). Indeed, communicating flood hazard promotes the preparedness of individuals and communities to cope with flooding, and enhance their capability to respond adequately, also in relation to the local attitude to deal with floods. Therefore, it is crucial to produce compelling, clear, understandable, and actionable flood hazard maps, which can satisfy the specific expectations

and needs of different stakeholders and end-users and can be correctly interpreted by non-experts too (Feldman et al., 2016; Hagemeier-Klose & Wagner, 2009; Henstra et al., 2019). To this end, 3D flood hazard mapping (e.g., FEMA, 2013; Macchione et al., 2019) may be a powerful and effective tool to improve flood hazard perception. Finally, it is advisable that flood hazard maps be freely available through public web portals and GIS applications (Environment Agency, 2019; Géorisques, 2022), together with practical advice to reduce the impact of flooding (OPW, 2022).

4 | CONCLUSIONS

Flood hazard assessment is a key step in flood risk analysis, which in turn translates into emergency planning, flood risk management strategies, and mitigation and protection measures to improve the resilience of communities living in flood-prone areas. This justifies the great attention paid to this topic in the past decades.

A comprehensive literature review of the quantitative methods currently used by scientists and practitioners for flood hazard assessment is presented in this article. Such methods are typically based on the quantitative categorisation of a suitable flood hazard index, defined as a combination of relevant flooding parameters. Hydrodynamic numerical modelling of the flooding process is required to calculate the flood hazard index and determine the flood hazard level (based on the associated classification). Basic details on quantitative methods proposed in scientific studies or adopted by government agencies were reported in summary tables, indicating the mode of expression for flood hazard (flood intensity only, or flood intensity in combination with flood probability), the methodological approach (conceptual, empirical, or heuristic), the exposed elements considered (people, vehicles, buildings, etc.), and the contexts of application (riverine flooding, dam-break or levee breach flooding, flooding in coastal or urban areas, debris flow, etc.).

This review aims to help modellers and practitioners select the most appropriate flood hazard assessment method for the specific needs and the application of interest, as well as identify references where relevant application examples and case studies can be found. A flood hazard analysis based on thorough knowledge of the features of existing flood hazard methods can support more informed assessments, consequently more effective decision-making.

Aspects that are worth improving and represent future challenges in flood hazard assessment analysis were discussed in detail. These range from the representativeness of the flood hazard indicator depending on the

flooding cause and the stage of the flood event, to the standardisation and validation of the flood hazard classification methods, as well as the mapping of flood hazard uncertainty. The effective communication of the outcomes of a flood hazard analysis increases public awareness of the potential harm of flooding, thereby reducing its negative impact in terms of loss of life, economic and social damage, and loss of cultural and environmental heritage.

The comprehensive analysis of the current quantitative flood hazard assessment methods might encourage new contributions for improved hazard evaluation in flood risk mapping.

ACKNOWLEDGEMENT

This work was supported by the Italian Ministry of University and Research through the PRIN 2017 Project RELAID (REnaissance of LArge Italian Dams), project number 2017T4JC5K.

DATA AVAILABILITY STATEMENT

Data availability statement is not applicable for this article.

ORCID

Andrea Maranzoni  <https://orcid.org/0000-0001-8841-1397>

Marco D'Oria  <https://orcid.org/0000-0002-5154-7052>

REFERENCES

- Abdulrahman, K. Z., Faris, M. R., Ibrahim, H. M., Yousif, O. S. Q., Ghafoor, A. A., Othman, L. S., & Karakouzian, M. (2022). Hypothetical failure of the Khassa Chai dam and flood risk analysis for Kirkuk, Iraq. *Natural Hazards*, 113(3), 1833–1851. <https://doi.org/10.1007/s11069-022-05371-2>
- Abt, S. R., Wittier, R. J., Taylor, A., & Love, D. J. (1989). Human stability in a high flood hazard zone. *Journal of the American Water Resources Association*, 25(4), 881–890. <https://doi.org/10.1111/j.1752-1688.1989.tb05404.x>
- ACER. (1988). *Downstream hazard classification guidelines*. Technical Memorandum No. 11. Assistant Commissioner – Engineering and Research, U.S. Department of the Interior, Bureau of Reclamation, Denver, CO. <https://mde.maryland.gov/programs/Water/DamSafety/Documents/Dam-Breach-Analysis/USBR-ACER-TM11-Downstream-Hazard-Classification-Guide-lines.pdf>
- Adige River Basin Authority. (2005). *Piano stralcio di bacino per l'assetto idrogeologico, Bacino dell'Adige — Relazione illustrativa di sintesi [Basin extract plan for the hydrogeological asset, Adige River Basin — Explanatory report]*. Adige River Basin Authority, Italy (in Italian). http://www.bacino-adige.it/sito/pianificazione/PAI/RELAZIONE_ILLUSTRATIVAIDI_SINTESI_8.2.2005_agg_x_appr_finale.pdf
- Ahmadisharaf, E., Bhuyian, M. N. M., & Kalyanapu, A. (2013). Impact of spatial resolution on downstream flood hazard due to dam break events using probabilistic flood modeling. *Proceedings of the Association of State Dam Safety Officials Annual*

- Conference 2013. Association of State Dam Safety Officials (ASDSO), (pp. 8–12). https://media.goldsim.com/Documents/TechnicalPapers/Ahmadisharafetal.2013_FinalPaper.pdf
- Ahmadisharaf, E., Kalyanapu, A. J., & Chung, E.-S. (2015). Evaluating the effects of inundation duration and velocity on selection of flood management alternatives using multi-criteria decision making. *Water Resources Management*, 29(8), 2543–2561. <https://doi.org/10.1007/s11269-015-0956-4>
- AIDR. (2017). *Flood hazard. Australian disaster resilience handbook collection. Guideline 7-3*. Australian Institute for Disaster Resilience. <https://knowledge.aidr.org.au/media/3518/adr-guideline-7-3.pdf>
- Al Bakry, M. A., Islam, M., & Paul, S. (2020). Flood hazard, vulnerability and risk assessment for different land use classes using a flow model. *Earth Systems and Environment*, 4(1), 225–244. <https://doi.org/10.1007/s41748-019-00141-w>
- Albano, R., Mancusi, L., Adamowski, J., Cantisani, A., & Sole, A. (2019). A GIS tool for mapping dam-break flood hazards in Italy. *ISPRS International Journal of Geo-Information*, 8(6), 250. <https://doi.org/10.3390/ijgi8060250>
- Albano, R., Sole, A., Adamowski, J., & Mancusi, L. (2014). A GIS-based model to estimate flood consequences and the degree of accessibility and operability of strategic emergency response structures in urban areas. *Natural Hazards and Earth System Sciences*, 14(11), 2847–2865. <https://doi.org/10.5194/nhess-14-2847-2014>
- Aleotti, P., Polloni, G., Tropeano, D., & Turconi, L. (2004). Numerical modeling to determine risk scenarios in an alpine alluvial fan. *WIT Transactions on Ecology and the Environment*, 77, 153–162. <https://doi.org/10.2495/RISK040141>
- Álvarez, M., Puertas, J., Peña, E., & Bermúdez, M. (2017). Two-dimensional dam-break flood analysis in data-scarce regions: The case study of Chipembe dam, Mozambique. *Water*, 9(6), 432. <https://doi.org/10.3390/w9060432>
- Araújo, P. V. N., Amaro, V. E., Silva, R. M., & Lopes, A. B. (2019). Delimitation of flood areas based on a calibrated DEM and geoprocessing: Case study on the Uruguay River, Itaqui, southern Brazil. *Natural Hazards and Earth System Sciences*, 19(1), 237–250. <https://doi.org/10.5194/nhess-19-237-2019>
- Aronica, G. T., Biondi, G., Brigandì, G., Cascone, E., Lanza, S., & Randazzo, G. (2012). Assessment and mapping of debris-flow risk in a small catchment in eastern Sicily through integrated numerical simulations and GIS. *Physics and Chemistry of the Earth, Parts A/B/C*, 49, 52–63. <https://doi.org/10.1016/j.pce.2012.04.002>
- Aronica, G. T., Candela, A., Fabio, P., & Santoro, M. (2012). Estimation of flood inundation probabilities using global hazard indexes based on hydrodynamic variables. *Physics and Chemistry of the Earth, Parts A/B/C*, 42–44, 119–129. <https://doi.org/10.1016/j.pce.2011.04.001>
- Aronica, G. T., Franzia, F., Bates, P. D., & Neal, J. C. (2012). Probabilistic evaluation of flood hazard in urban areas using Monte Carlo simulation. *Hydrological Processes*, 26(26), 3962–3972. <https://doi.org/10.1002/hyp.8370>
- Arrighi, C., Huybrechts, N., Ouahsine, A., Chassé, P., Oumeraci, H., & Castelli, F. (2016). Vehicles instability criteria for flood risk assessment of a street network. *Proceedings of the International Association of Hydrological Sciences*, 373, 143–146. <https://doi.org/10.5194/piahs-373-143-2016>
- Aureli, F., Maranzoni, A., Mignosa, P., & Ziveri, C. (2008). 2D numerical modelling for hydraulic hazard assessment: A dam-break case study. *Proceedings of River Flow 2008, 4th International Conference on Fluvial Hydraulics* (pp. 729–736). Kubaba Congress Department and Travel Services, Ankara, Turkey.
- Banks, J. C., Camp, J. V., & Abkowitz, M. D. (2014). Adaptation planning for floods: A review of available tools. *Natural Hazards*, 70(2), 1327–1337. <https://doi.org/10.1007/s11069-013-0876-7>
- Bates, P. D. (2004). Remote sensing and flood inundation modeling. *Hydrological Processes*, 18(13), 2593–2597. <https://doi.org/10.1002/hyp.5649>
- Bathrellos, G. D., Karymbalis, E., Skilodimou, H. D., Gaki-Papanastassiou, K., & Baltas, E. A. (2016). Urban flood hazard assessment in the basin of Athens Metropolitan city, Greece. *Environmental Earth Sciences*, 75(4), 319. <https://doi.org/10.1007/s12665-015-5157-1>
- Beckers, A., Dewals, B., Erpicum, S., Dujardin, S., Detrembleur, S., Teller, J., Pirotton, M., & Archambeau, P. (2013). Contribution of land use changes to future flood damage along the river Meuse in the Walloon region. *Natural Hazards and Earth System Sciences*, 13(9), 2301–2318. <https://doi.org/10.5194/nhess-13-2301-2013>
- Beffa, C. (2000). A statistical approach for spatial analysis of flood prone areas. *Proceedings of the International Symposium on Flood Defence*, Kassel, Germany. http://www.fluvial.ch/pub/spatial_analysis_of_flood_prone_areas.PDF
- Beven, K., Lamb, R., Leedal, D., & Hunter, N. (2015). Communicating uncertainty in flood inundation mapping: A case study. *International Journal of River Basin Management*, 13(3), 285–295. <https://doi.org/10.1080/15715124.2014.917318>
- Bhat, M. S., Alam, A., Ahmad, S., Farooq, H., & Ahmad, B. (2019). Flood hazard assessment of upper Jhelum basin using morphometric parameters. *Environmental Earth Sciences*, 78(2), 54. <https://doi.org/10.1007/s12665-019-8046-1>
- Bhola, P. K., Leandro, J., & Disse, M. (2020). Building hazard maps with differentiated risk perception for flood impact assessment. *Natural Hazards and Earth System Sciences*, 20(10), 2647–2663. <https://doi.org/10.5194/nhess-20-2647-2020>
- Blöschl, G., Hall, J., Viglione, A., Perdigão, R. A. P., Parajka, J., Merz, B., Lun, D., Arheimer, B., Aronica, G. T., Bilibashi, A., Boháč, M., Bonacci, O., Borga, M., Čanjevac, I., Castellarin, A., Chirico, G. B., Claps, P., Frolova, N., Ganora, D., ... Živković, N. (2019). Changing climate both increases and decreases European river floods. *Nature*, 573(7772), 108–111. <https://doi.org/10.1038/s41586-019-1495-6>
- Bocanegra, R. A., Vallés-Morán, F. J., & Francés, F. (2020). Review and analysis of vehicle stability models during floods and proposal for future improvements. *Journal of Flood Risk Management*, 13(S1), e12551. <https://doi.org/10.1111/jfr.12551>
- Cançado, V., Brasil, L., Nascimento, N., & Guerra, A. (2008). Flood risk assessment in an urban area: Measuring hazard and vulnerability. *Proceedings of the 11th International Conference on Urban Drainage*, Edinburgh, UK. https://www.researchgate.net/profile/Nilo-Nascimento/publication/228507992_Flood_risk_assessment_in_an_urban_area_Measuring_hazard_and_vulnerability/links/0f31753506b5bb838f000000/Flood-risk-assessment-in-an-urban-area-Measuring-hazard-and-vulnerability.pdf
- Carrasco, A. R., Ferreira, Ó., Matias, A., & Freire, P. (2012). Flood hazard assessment and management of fetch-limited coastal environments. *Ocean & Coastal Management*, 65, 15–25. <https://doi.org/10.1016/j.ocecoaman.2012.04.016>
- CDSO. (2020). *Guidelines for classifying the hazard potential of dams* (Doc. No. CDSO_GUD_DS_09_v1.0). Dam Safety

- Rehabilitation Directorate, Central Dam Safety Organization, Central Water Commission, New Delhi, India. https://damsafety.in/ecm-includes/PDFs/Guidelines_for_Classifying_the_Hazard_Potential_of_Dams.pdf
- Cea, L., & Costabile, P. (2022). Flood risk in urban areas: Modelling, management and adaptation to climate change. A review. *Hydrology*, 9(3), 50. <https://doi.org/10.3390/hydrology9030050>
- CHARIM. (2021). *Caribbean handbook on risk management. Methodology book*. Caribbean Disaster Emergency Management Agency. <https://cdema.org/virtuallibrary/index.php/charim-hbook/methodology/1-introduction/1-1-objectives-of-this-book-d43>
- Chen, H., Ito, Y., Sawamukai, M., & Tokunaga, T. (2015). Flood hazard assessment in the Kujukuri Plain of Chiba Prefecture, Japan, based on GIS and multicriteria decision analysis. *Natural Hazards*, 78(1), 105–120. <https://doi.org/10.1007/s11069-015-1699-5>
- Clausen, L., & Clark, P. B. (1990). The development of criteria for predicting dambreak flood damages using modelling of historical dam failures. *Proceedings of the International Conference on River Flood Hydraulics* (pp. 369–380). John Wiley & Sons.
- Correia, F. N., Fordham, M., Saraiva, M. D. G., & Bernardo, F. (1998). Flood hazard assessment and management: Interface with the public. *Water Resources Management*, 12(3), 209–227. <https://doi.org/10.1023/a:1008092302962>
- Costabile, P., Costanzo, C., De Lorenzo, G., De Santis, R., Penna, N., & Macchione, F. (2021). Terrestrial and airborne laser scanning and 2-D modelling for 3-D flood hazard maps in urban areas: New opportunities and perspectives. *Environmental Modelling & Software*, 135, 104889. <https://doi.org/10.1016/j.envsoft.2020.104889>
- Costabile, P., Costanzo, C., Ferraro, D., Macchione, F., & Petaccia, G. (2020). Performances of the new HEC-RAS version 5 for 2-D hydrodynamic-based rainfall-runoff simulations at basin scale: Comparison with a state-of-the art model. *Water*, 12(9), 2326. <https://doi.org/10.3390/w12092326>
- Cox, R. J., Shand, T. D., & Blacka, M. J. (2010). *Australian rainfall and runoff. Revision Project 10: Appropriate safety criteria for people* (Report P10/S1/006). Water Research Laboratory, University of New South Wales, Australia. https://arr.ga.gov.au/_data/assets/pdf_file/0006/40578/ARR_Project_10_Stage1_report_Final.pdf
- CRED-UNDRR. (2020). *The human cost of disasters: An overview of the last 20 years (2000–2019)*. Centre for Research on the Epidemiology of Disasters — UN Office for Disaster Risk Reduction. https://cred.be/sites/default/files/adsr_2019.pdf
- D'Oria, M., Maranzoni, A., & Mazzoleni, M. (2019). Probabilistic assessment of flood hazard due to levee breaches using fragility functions. *Water Resources Research*, 55(11), 8740–8764. <https://doi.org/10.1029/2019WR025369>
- de Bruijn, K. M., Klijn, F., van de Pas, B., & Slager, C. T. J. (2015). Flood fatality hazard and flood damage hazard: Combining multiple hazard characteristics into meaningful maps for spatial planning. *Natural Hazards and Earth System Sciences*, 15(6), 1297–1309. <https://doi.org/10.5194/nhess-15-1297-2015>
- de Moel, H., Jongman, B., Kreibich, H., Merz, B., Penning-Rowsell, E., & Ward, P. J. (2015). Flood risk assessments at different spatial scales. *Mitigation and Adaptation Strategies for Global Change*, 20(6), 865–890. <https://doi.org/10.1007/s11027-015-9654-z>
- de Moel, H., van Alphen, J., & Aerts, J. C. J. H. (2009). Flood maps in Europe – methods, availability and use. *Natural Hazards and Earth System Sciences*, 9(2), 289–301. <https://doi.org/10.5194/nhess-9-289-2009>
- Decree 2019-715. (2019). *Décret n° 2019-715 du 5 juillet 2019 relatif aux plans de prévention des risques concernant les “aléas débordement de cours d'eau et submersion marine”* [Decree no. 2019-715 of July 5, 2019 relating to risk prevention plans concerning the “risks of river overflowing and marine submersion”]. Official Journal of the French Republic no. 156 of 7 July 2019. https://www.legifrance.gouv.fr/download/pdf?id=KQxjoa_ax4fUB3QLICMaKiu1fmt64dDetDQxhvJZNMc=
- DEFRA Environment Agency. (2006a). *R&D outputs: Flood risks to people* (FD2321/TR1 The Flood Risks to People Methodology). Department for Environment, Food and Rural Affairs, London, UK. https://www.e-lindsey.gov.uk/media/19064/ID26-FD2321-TR1/pdf/ID26_-_FD2321_TR1_The_Flood_Risks_to_People_Methodology.pdf?m=637564071968330000
- DEFRA Environment Agency. (2006b). *Flood risks to people* (FD2321/TR2 Guidance Document). Department for Environment, Food and Rural Affairs, London, UK. https://assets.publishing.service.gov.uk/media/602bbc3de90e07055f646148/Flood_risks_to_people_-_Phase_2_Guidance_Document_Technical_report.pdf
- Di Baldassarre, G., Castellarin, A., Montanari, A., & Brath, A. (2009). Probability-weighted hazard maps for comparing different flood risk management strategies: A case study. *Natural Hazards*, 50(3), 479–496. <https://doi.org/10.1007/s11069-009-9355-6>
- Di Baldassarre, G., Schumann, G., Bates, P. D., Freer, J. E., & Beven, K. J. (2010). Flood-plain mapping: A critical discussion of deterministic and probabilistic approaches. *Hydrological Sciences Journal*, 55(3), 364–376. <https://doi.org/10.1080/02626661003683389>
- Doocy, S., Daniels, A., Murray, S., & Kirsch, T. D. (2013). The human impact of floods: A historical review of events 1980–2009 and systematic literature review. *PLoS Currents*, 5, ecurrents.dis.f4deb457904936b07c09daa98ee8171a. <https://doi.org/10.1371/currents.dis.f4deb457904936b07c09daa98ee8171a>
- Dráb, A., & Říha, J. (2010). An approach to the implementation of European Directive 2007/60/EC on flood risk management in the Czech Republic. *Natural Hazards and Earth System Sciences*, 10(9), 1977–1987. <https://doi.org/10.5194/nhess-10-1977-2010>
- Díez-Herrero, A., Laín-Huerta, L., & Llorente-Isidro, M. (2009). *A handbook on flood hazard mapping methodologies*. Geological Hazards/Geotechnics series (No. 2). Spanish Geological Survey. <https://www.igme.es/Publicaciones/publiFree/HandbookFoodHazard/Pdfparadescargar/Ahandbookonfoodhazardmappingtechnologies.pdf>
- Efstratiadis, A., Dimas, P., Pouliasis, G., Tsoukalas, I., Kossleris, P., Bellos, V., Sakki, G.-K., Makropoulos, C., & Michas, S. (2022). Revisiting flood hazard assessment practices under a hybrid stochastic simulation framework. *Water*, 14(3), 457. <https://doi.org/10.3390/w14030457>
- Environment Agency. (2019). *Learn more about flood risk*. Environment Agency, UK. <https://check-long-term-flood-risk.service.gov.uk/map>
- Environment Agency. (2021). *Improving probabilistic flood risk modelling*. Environment Agency, UK. <https://www.gov.uk/flood-and-coastal-erosion-risk-management-research-reports/improving-probabilistic-flood-risk-modelling#details>
- Erena, S. H., Worku, H., & De Paola, F. (2018). Flood hazard mapping using FLO-2D and local management strategies of Dire

- Dawa city, Ethiopia. *Journal of Hydrology: Regional Studies*, 19, 224–239. <https://doi.org/10.1016/j.ejrh.2018.09.005>
- ERG. (2013). *Hurricane forecast improvement program socio-economic research and recommendations* (Final Report). Eastern Research Group. Prepared for National Oceanic and Atmospheric Administration, National Weather Service, Arlington, VA. <https://hfip.org/sites/default/files/documents/societalimpacts-finalreport-2013.pdf>
- ESCAP. (1991). *Manual and guidelines for comprehensive flood loss prevention and management* (ST/ESCAP/933). Economic and Social Commission for Asia and the Pacific, United Nations Development Program, Bangkok, Thailand. https://www.unescap.org/sites/default/d8files/knowledge-products/Manual_andGuidelinesforComprehensiveFloodLossPreventionandManagement.pdf
- European Council. (2007). *Directive 2007/60/EU of the European Parliament and of the Council of 23 October 2007 on the assessment and management of flood risks*. <https://eur-lex.europa.eu/legal-content/EN/TXT/?uri=CELEX:32007L0060>
- Evans, B., Chen, A. S., Djordjević, S., Webber, J., Gómez, A. G., & Stevens, J. (2020). Investigating the effects of pluvial flooding and climate change on traffic flows in Barcelona and Bristol. *Sustainability*, 12(6), 2330. <https://doi.org/10.3390/su12062330>
- Farid, M., Pusparani, H. H., Kusuma, M. S. B., & Natasaputra, S. (2017). Study on effectiveness of flood control based on risk level: Case study of Kampung Melayu Village and Bukit Duri Village. *MATEC Web of Conferences*, 101, 05003. <https://doi.org/10.1051/matecconf/201710105003>
- Farooq, M., Shafique, M., & Khattak, M. S. (2019). Flood hazard assessment and mapping of River Swat using HEC-RAS 2D model and high-resolution 12-m TanDEM-X DEM (WorldDEM). *Natural Hazards*, 97(2), 477–492. <https://doi.org/10.1007/s11069-019-03638-9>
- Feldman, D., Contreras, S., Karlin, B., Basolo, V., Matthew, R., Sanders, B., Houston, D., Cheung, W., Goodrich, K., Reyes, A., Serrano, K., Schubert, J., & Luke, A. (2016). Communicating flood risk: Looking back and forward at traditional and social media outlets. *International Journal of Disaster Risk Reduction*, 15, 43–51. <https://doi.org/10.1016/j.ijdrr.2015.12.004>
- FEMA. (2013). *Federal guidelines for inundation mapping of flood risks associated with dam incidents and failures* (FEMA P-946). Federal Emergency Management Agency, US. <https://damsafety.org/sites/default/files/FEMAFederalGuidelinesInundatnMapP946.pdf>
- FEMA. (2020). *Guidance for flood risk analysis and mapping. Two-dimensional analysis* (Guidance Document 81). Federal Emergency Management Agency, US. https://www.fema.gov/sites/default/files/documents/fema_hydraulics-two-dimensional-analyses.pdf
- FEMA. (2021). *Flood insurance manual*. National Flood Insurance Program. Federal Emergency Management Agency, US. https://www.fema.gov/sites/default/files/documents/fema_nfip-all-flood-insurance-manual-apr-2021.pdf
- Ferrari, A., Dazzi, S., Vacondio, R., & Mignosa, P. (2020). Enhancing the resilience to flooding induced by levee breaches in lowland areas: A methodology based on numerical modelling. *Natural Hazards and Earth System Sciences*, 20(1), 59–72. <https://doi.org/10.5194/nhess-20-59-2020>
- Ferrari, A., Viero, D. P., Vacondio, R., Defina, A., & Mignosa, P. (2019). Flood inundation modeling in urbanized areas: A mesh-independent porosity approach with anisotropic friction. *Advances in Water Resources*, 125, 98–113. <https://doi.org/10.1016/j.advwatres.2019.01.010>
- FLOODsite. (2009). *Integrated flood risk analysis and management methodologies*. FLOODsite. <http://www.floodsite.net/>
- Förster, S., Kuhlmann, B., Lindenschmidt, K. E., & Bronstert, A. (2008). Assessing flood risk for a rural detention area. *Natural Hazards and Earth System Sciences*, 8(2), 311–322. <https://doi.org/10.5194/nhess-8-311-2008>
- García-Martínez, R., & López, J. L. (2005). Debris flows of December 1999 in Venezuela. In *Debris-flow hazards and related phenomena*. Springer. https://doi.org/10.1007/3-540-27129-5_20
- Garrote, J., Díez-Herrero, A., Escudero, C., & García, I. (2020). A framework proposal for regional-scale flood-risk assessment of cultural heritage sites and application to the Castile and León Region (Central Spain). *Water*, 12(2), 329. <https://doi.org/10.3390/w12020329>
- Garrote, J., Peña, E., & Díez-Herrero, A. (2021). Probabilistic flood hazard maps from Monte Carlo derived peak flow values — An application to flood risk management in Zamora city (Spain). *Applied Sciences*, 11(14), 6629. <https://doi.org/10.3390/app11146629>
- Ghazali, N. H. M., & Osman, S. (2019). Flood hazard mapping in Malaysia: Case study Sg. Kelantan river basin. In K. Kobayashi, I. D. A. Sutapa, G. Q. Tabios III, Y. Tachikawa, & H. D. Thulstrup (Eds.), *Catalogue of hydrologic analysis for Asia and the Pacific. Flood hazard mapping* (Vol. 1, pp. 54–80). The UNESCO-IHP Regional Steering Committee for Asia and the Pacific. http://hywr.kuciv.kyoto-u.ac.jp/ihp/cha/vol1/Malaysia_HazardMap.pdf
- Guillier, F. (2017). French insurance and flood risk: Assessing the impact of prevention through the rating of action programs for flood prevention. *International Journal of Disaster Risk Science*, 8(3), 284–295. <https://doi.org/10.1007/s13753-017-0140-y>
- Géorisques. (2020). *Zonages inondation — Rapportage 2020 [Flood zoning — Report 2020]*. Géorisques, France. <https://www.georisques.gouv.fr/donnees/bases-de-donnees/zonages-inondation-rapportage-2020>
- Géorisques. (2022). *Inondations. S'informer pour mieux se protéger [Floods. Get informed to better protect yourself]*. Géorisques, France. <https://www.georisques.gouv.fr/risques/inondations>
- Hagemeier-Klose, M., & Wagner, K. (2009). Evaluation of flood hazard maps in print and web mapping services as information tools in flood risk communication. *Natural Hazards and Earth System Sciences*, 9(2), 563–574. <https://doi.org/10.5194/nhess-9-563-2009>
- Hammond, M. J., Chen, A. S., Djordjević, S., Butler, D., & Mark, O. (2015). Urban flood impact assessment: A state-of-the-art review. *Urban Water Journal*, 12(1), 14–29. <https://doi.org/10.1080/1573062X.2013.857421>
- Henstra, D., Minano, A., & Thistlethwaite, J. (2019). Communicating disaster risk? An evaluation of the availability and quality of flood maps. *Natural Hazards and Earth System Sciences*, 19(1), 313–323. <https://doi.org/10.5194/nhess-19-313-2019>
- Hirabayashi, Y., Mahendran, R., Koirala, S., Konoshima, L., Yamazaki, D., Watanabe, S., Kim, H., & Kanae, S. (2013). Global flood risk under climate change. *Nature Climate Change*, 3(9), 816–821. <https://doi.org/10.1038/nclimate1911>
- HORA. (2022). *Hochwasserrisikozonierung [Flood risk zoning]*. Natural Hazard Overview & Risk Assessment, Austria. <https://hora.at/>

- Hurtado-Pidal, J., Acero Triana, J. S., Espitia-Sarmiento, E., & Jarrín-Pérez, F. (2020). Flood hazard assessment in data-scarce watersheds using model coupling, event sampling, and survey data. *Water*, 12(10), 2768. <https://doi.org/10.3390/w12102768>
- Hürlimann, M., Copons, R., & Altimir, J. (2006). Detailed debris flow hazard assessment in Andorra: A multidisciplinary approach. *Geomorphology*, 78(3–4), 359–372. <https://doi.org/10.1016/j.geomorph.2006.02.003>
- Hürlimann, M., Rickenmann, D., Medina, V., & Bateman, A. (2008). Evaluation of approaches to calculate debris-flow parameters for hazard assessment. *Engineering Geology*, 102(3–4), 152–163. <https://doi.org/10.1016/j.enggeo.2008.03.012>
- ICPDR. (2021). *2021 updates to Danube River Basin & Flood Risk Management Plans Published*. International Commission of the Protection of the Danube River. <http://www.icpdr.org/main/2021-updates-danube-river-basin-flood-risk-management-plans-published>
- ICPR. (2021). *Flood Risk Management Plan*. International Commission for the Protection of the Rhine. <https://www.iksr.org/en/eu-directives/floods-directive/flood-risk-management-plan>
- INTEGEMS. (2017). *Update of Sierra Leone hazard profile and capacity gap analysis* (Final Report). Integrated Geo-information and Environmental Management Services, Freetown, Sierra Leone. [http://88.208.202.41/images/reports/SECURED_FULLREPORTFINAL\(09-11-2017\)-SIERRALEONEHAZARDPROFILEANDCAPACITYGAPANALYSIS.pdf](http://88.208.202.41/images/reports/SECURED_FULLREPORTFINAL(09-11-2017)-SIERRALEONEHAZARDPROFILEANDCAPACITYGAPANALYSIS.pdf)
- IPCC. (2012). *Managing the risks of extreme events and disasters to advance climate change adaptation*. Special Report of the Intergovernmental Panel on Climate Change. In C. B. Field, V. Barros, T. F. Stocker, Q. Dahe, D. J. Dokken, K. L. Ebi, M. D. Mastrandrea, K. J. Mach, G.-K. Plattner, S. K. Allen, M. Tignor, & P. M. Midgley (Eds.). Cambridge University Press. https://www.ipcc.ch/site/assets/uploads/2018/03/SREX_Full_Report-1.pdf
- Islam, M. M., & Sado, K. (2000). Flood hazard assessment in Bangladesh using NOAA AVHRR data with geographical information system. *Hydrological Processes*, 14(3), 605–620. [https://doi.org/10.1002/\(SICI\)1099-1085\(20000228\)14:3<605::AID-HYP957>3.0.CO;2-L](https://doi.org/10.1002/(SICI)1099-1085(20000228)14:3<605::AID-HYP957>3.0.CO;2-L)
- ISPRA. (2012). *Proposta metodologica per l'aggiornamento delle mappe di pericolosità e di rischio [Methodological proposal for updating hazard and risk maps]*. Italian Higher Institute for Environmental Protection and Research (in Italian). https://www.isprambiente.gov.it/files/pubblicazioni/manuali-lineeguida/MLG_82_2012.pdf
- Jonkman, S. N., & Penning-Rowsell, E. (2008). Human instability in flood flows. *Journal of the American Water Resources Association*, 44(5), 1208–1218. <https://doi.org/10.1111/j.1752-1688.2008.00217.x>
- Karvonen, T., Hepojoki, A., Kotola, J., Huhta, H.-K., & Louhio, A. (2000). *The use of physical models in dam-break flood analysis. Development of Rescue Actions Based on Dam-Break Flood Analysis (RESCDAM)*. Final report of Helsinki University of Technology. Finnish Environment Institute, Helsinki, Finland.
- Khaing, Z. M., Zhang, K., Sawano, H., Shrestha, B. B., Sayama, T., & Nakamura, K. (2019). Flood hazard mapping and assessment in data-scarce Nyaungdon area, Myanmar. *PLoS One*, 14(11), e0224558. <https://doi.org/10.1371/journal.pone.0224558>
- Kim, T. H., Kim, B., & Han, K.-Y. (2019). Application of fuzzy TOPSIS to flood hazard mapping for levee failure. *Water*, 11(3), 592. <https://doi.org/10.3390/w11030592>
- Kittipongvises, S., Phetrak, A., Rattanapun, P., Brundiers, K., Buizer, J. L., & Melnick, R. (2020). AHP-GIS analysis for flood hazard assessment of the communities nearby the world heritage site on Ayutthaya Island, Thailand. *International Journal of Disaster Risk Reduction*, 48, 101612. <https://doi.org/10.1016/j.ijdrr.2020.101612>
- Klemešová, K. (2016). Flood maps in the Czech Republic: Content, perception and information value. *E3S Web of Conferences*, 7, 10006. <https://doi.org/10.1051/e3sconf/20160710006>
- Klijn, F., Samuels, P., & Van Os, A. (2008). Towards flood risk management in the EU: State of affairs with examples from various European countries. *International Journal of River Basin Management*, 6(4), 307–321. <https://doi.org/10.1080/15715124.2008.963535>
- Kourgialas, N. N., & Karatzas, G. P. (2011). Flood management and a GIS modelling method to assess flood-hazard areas — A case study. *Hydrological Sciences Journal*, 56(2), 212–225. <https://doi.org/10.1080/02626667.2011.555836>
- Kramer, M., Terheiden, K., & Weprecht, S. (2016). Safety criteria for the trafficability of inundated roads in urban floodings. *International Journal of Disaster Risk Reduction*, 17, 77–84. <https://doi.org/10.1016/j.ijdrr.2016.04.003>
- Kreibich, H., Piroth, K., Seifert, I., Maiwald, H., Kunert, U., Schwarz, J., Merz, B., & Thielen, A. H. (2009). Is flow velocity a significant parameter in flood damage modelling? *Natural Hazards and Earth System Sciences*, 9(5), 1679–1692. <https://doi.org/10.5194/nhess-9-1679-2009>
- Krieger, K., Schmitt, T. G., & Illgen, M. (2017). Risikomanagement in der kommunalen Überflutungsvorsorge nach DWA-Merkblatt M 119 [Risk management in municipal flood protection according to booklet DWA M 119]. *GWF Wasser/Abwasser*, 158, 34–39 (in German).
- Kron, W. (2002). Keynote lecture: Flood risk = hazard × exposure × vulnerability. In B. Wu, Z.-Y. Wang, G. Wang, G. G. H. Huang, H. Fang, & J. Huang (Eds.), *Flood defence 2002* (Vol. 1, pp. 82–97). Science Press. <http://www.civil.ist.utl.pt/~joana/DFA-riscos-net/2007-08/kron-flodrisk=hazard.pdf>
- KULTURisk. (2011). *About KULTURisk*. KULTURisk Project. <http://www.kulturisk.eu/project-definition>
- Kumar, R. (2016). Flood hazard assessment of 2014 floods in Sonawari sub-district of Bandipore district (Jammu&Kashmir): An application of geoinformatics. *Remote Sensing Applications: Society and Environment*, 4, 188–203. <https://doi.org/10.1016/j.rsase.2016.10.002>
- Kundzewicz, Z. W., Piśkwar, I., & Brakenridge, G. R. (2018). Changes in river flood hazard in Europe: A review. *Hydrology Research*, 49(2), 294–302. <https://doi.org/10.2166/nh.2017.016>
- Kvočka, D., Ahmadian, R., & Falconer, R. A. (2018). Predicting flood hazard indices in torrential or flashy river basins and catchments. *Water Resources Management*, 32(7), 2335–2352. <https://doi.org/10.1007/s11269-018-1932-6>
- Kvočka, D., Falconer, R. A., & Bray, M. (2016). Flood hazard assessment for extreme flood events. *Natural Hazards*, 84(3), 1569–1599. <https://doi.org/10.1007/s11069-016-2501-z>
- Lateltin, O. (1997). *Empfehlungen 1997 — Berücksichtigung der Massenbewegungsgefahren bei raumwirksamen Tätigkeiten [Recommendations 1997 — Consideration of landslide hazards as part of the activities of land use planning]*. BUWAL (Bundesamt für Umwelt, Wald und Landschaft), Berne, Switzerland (in German). <https://www.planat.ch/de/infomaterial-detail/>

- beruecksichtigung-der-massenbewegungsgefahren-bei-raumwirksamen-taetigkeiten
- LAWA. (2006). *Flood hazard map guidelines of the German Working Group of the Federal States on Water Issues*. German Working Group of the Federal States on Water Issues. https://www.lawa.de/documents/flood-hazard-map-guidelines_1552307459.pdf
- Lazzarin, T., Viero, D. P., Molinari, D., Ballio, F., & Defina, A. (2022). Flood damage functions based on a single physics- and data-based impact parameter that jointly accounts for water depth and velocity. *Journal of Hydrology*, 607, 127485. <https://doi.org/10.1016/j.jhydrol.2022.127485>
- Lee, J.-H., Seo, Y., Park, S.-S., & Cho, H.-S. (2019). Flood hazard map of Korea. In K. Kobayashi, I. D. A. Sutapa, G. Q. Tabios III, Y. Tachikawa, & H. D. Thulstrup (Eds.), *Catalogue of hydrologic analysis for Asia and the Pacific. Flood hazard mapping* (Vol. 1, pp. 38–53). The UNESCO-IHP Regional Steering Committee for Asia and the Pacific. http://hywr.kuciv.kyoto-u.ac.jp/ihp/cha/vol1/Korea_Flood_Hazard_Mapping.pdf
- Liu, W.-C., Hsieh, T.-H., & Liu, H.-M. (2021). Flood risk assessment in urban areas of southern Taiwan. *Sustainability*, 13(6), 3180. <https://doi.org/10.3390/su13063180>
- Loat, R. (2010). *Risk management of natural hazards in Switzerland*. Federal Office for the Environment, Switzerland. https://www.sistemaprotezionecivile.it/allegati/1149_Svizzera_Risk_Management.pdf
- Loat, R., & Petrascheck, A. (2008). *Consideration of flood hazards for activities with spatial impact. Recommendations*. Federal Office for Water Management, Switzerland. <https://www.bafu.admin.ch/bafu/en/home/topics/natural-hazards/publications-studies/publications/consideration-flood-hazards-activities-spatial-impact.html>
- Longenecker, H. E., Graeden, E., Kluskiewicz, D., Zuzak, C., Rozelle, J., & Aziz, A. L. (2020). A rapid flood risk assessment method for response operations and nonsubject-matter-expert community planning. *Journal of Flood Risk Management*, 13(1), e12579. <https://doi.org/10.1111/jfr3.12579>
- Luke, A., Sanders, B. F., Goodrich, K. A., Feldman, D. L., Boudreau, D., Eguiarte, A., Serrano, K., Reyes, A., Schubert, J. E., AghaKouchak, A., Basolo, V., & Matthew, R. A. (2018). Going beyond the flood insurance rate map: Insights from flood hazard map co-production. *Natural Hazards and Earth System Sciences*, 18(4), 1097–1120. <https://doi.org/10.5194/nhess-18-1097-2018>
- Lumbroso, D., Ramsbottom, D., & Spaliviero, M. (2008). Sustainable flood risk management strategies to reduce rural communities' vulnerability to flooding in Mozambique. *Journal of Flood Risk Management*, 1(1), 34–42. <https://doi.org/10.1111/j.1753-318X.2008.00005.x>
- Macchione, F., Costabile, P., Costanzo, C., & De Santis, R. (2019). Moving to 3-D flood hazard maps for enhancing risk communication. *Environmental Modelling & Software*, 111, 510–522. <https://doi.org/10.1016/j.envsoft.2018.11.005>
- Maijala, T. (2001). *RESCDAM: Development of rescue actions based on dam-break flood analysis* (Final Report). Finnish Environment Institute, Helsinki, Finland. https://civil-protection-humanitarian-aid.ec.europa.eu/system/files/2014-11/rescdam_rapportfin.pdf
- Mani, P., Chatterjee, C., & Kumar, R. (2014). Flood hazard assessment with multiparameter approach derived from coupled 1D and 2D hydrodynamic flow model. *Natural Hazards*, 70(2), 1553–1574. <https://doi.org/10.1007/s11069-013-0891-8>
- Maranzoni, A., D’Oria, M., & Mazzoleni, M. (2022). Probabilistic flood hazard mapping considering multiple levee breaches. *Water Resources Research*, 58(4), e2021WR030874. <https://doi.org/10.1029/2021WR030874>
- Martini, F., & Loat, R. (2007). *Handbook on good practices for flood mapping in Europe*. EXCIMAP (European Exchange Circle on Flood Mapping). European Environment Agency. https://ec.europa.eu/environment/water/flood_risk/flood_atlas/pdf/handbook_goodpractice.pdf
- Martínez-Gomariz, E., Gómez, M., Russo, B., & Djordjević, S. (2018). Stability criteria for flooded vehicles: A state-of-the-art review. *Journal of Flood Risk Management*, 11(S2), S817–S826. <https://doi.org/10.1111/jfr3.12262>
- Masood, M., & Takeuchi, K. (2012). Assessment of flood hazard, vulnerability and risk of mid-eastern Dhaka using DEM and 1D hydrodynamic model. *Natural Hazards*, 61(2), 757–770. <https://doi.org/10.1007/s11069-011-0060-x>
- MATE-METL. (1999). *Plans de prévention des risques naturels (PPR). Risques d'inondation. Guide méthodologique [Natural risk prevention plans. Flood risks. Methodological guidelines]*. Ministère de l'Aménagement du Territoire et de l'Environnement – Ministère de l'Équipement, des Transports et du Logement. La Documentation Française, Paris, France (in French). <https://side.developpement-durable.gouv.fr/Default/doc/SYRACUSE/6936/plans-de-prevention-des-risques-naturels-ppr-risques-d-inondation-guide-methodologique>
- Mazzoleni, M., Bacchi, B., Barontini, S., Di Baldassarre, G., Pilotti, M., & Ranzi, R. (2014). Flooding hazard mapping in floodplain areas affected by piping breaches in the Po River, Italy. *Journal of Hydrologic Engineering*, 19(4), 717–731. [https://doi.org/10.1061/\(ASCE\)HE.1943-5584.0000840](https://doi.org/10.1061/(ASCE)HE.1943-5584.0000840)
- Merwade, V., Olivera, F., Arabi, M., & Edleman, S. (2008). Uncertainty in flood inundation mapping: Current issues and future directions. *Journal of Hydrologic Engineering*, 13(7), 608–620. [https://doi.org/10.1061/\(ASCE\)1084-0699\(2008\)13:7\(608\)](https://doi.org/10.1061/(ASCE)1084-0699(2008)13:7(608))
- Merz, B., Kreibich, H., Schwarze, R., & Thielen, A. (2010). Review article “Assessment of economic flood damage”. *Natural Hazards and Earth System Sciences*, 10(8), 1697–1724. <https://doi.org/10.5194/nhess-10-1697-2010>
- Merz, B., Thielen, A. H., & Gocht, M. (2007). Flood risk mapping at the local scale: Concepts and challenges. In S. Begum, M. J. F. Stive, & J. W. Hall (Eds.), *Flood risk management in Europe. Advances in natural and technological hazards research* (Vol. 25, pp. 231–251). Springer. https://doi.org/10.1007/978-1-4020-4200-3_13
- Mignot, E., & Dewals, B. (2022). Hydraulic modelling of inland urban flooding: Recent advances. *Journal of Hydrology*, 609, 127763. <https://doi.org/10.1016/j.jhydrol.2022.127763>
- Mihu-Pintilie, A., Cimpianu, C. I., Stoleriu, C. C., Pérez, M. N., & Paveluc, L. E. (2019). Using high-density LiDAR data and 2D streamflow hydraulic modeling to improve urban flood hazard maps: A HEC-RAS multi-scenario approach. *Water*, 11(9), 1832. <https://doi.org/10.3390/w11091832>
- Milanesi, L., Pilotti, M., & Ranzi, R. (2015). A conceptual model of people's vulnerability to floods. *Water Resources Research*, 51(1), 182–197. <https://doi.org/10.1002/2014WR016172>

- Ministerio de Medio Ambiente. (1996). *Clasificación de presas en función del riesgo potencial. Guía Técnica [Dam classification based on the potential risk of failure. Technical Guidelines]*. Spanish Ministry of the Environment (in Spanish). https://www.miteco.gob.es/es/agua/publicaciones/clasificacion_presas_tcm30-216049.pdf
- MLIT. (2015). *Manual of flood inundation mapping*. Water and Disaster Management Bureau, Ministry of Land, Infrastructure, Transport and Tourism, Japan. https://www.mlit.go.jp/river/shishin_guideline/pdf/manual_kouzuishinsui_1710.pdf
- Molinari, D., De Bruijn, K. M., Castillo-Rodríguez, J. T., Aronica, G. T., & Bouwer, L. M. (2019). Validation of flood risk models: Current practice and possible improvements. *International Journal of Disaster Risk Reduction*, 33, 441–448. <https://doi.org/10.1016/j.ijdrr.2018.10.022>
- Moreira, L. L., de Brito, M. M., & Kobiyama, M. (2021). Review article: A systematic review and future prospects of flood vulnerability indices. *Natural Hazards and Earth System Sciences*, 21(5), 1513–1530. <https://doi.org/10.5194/nhess-21-1513-2021>
- Morris, M., & Hassan, M. (2005). IMPACT: Investigation of extreme flood processes and uncertainty — A European research project. *Proceedings of the 40th DEFRA Flood and Coastal Management Conference*. HR Wallingford, UK. https://eprints.hrwallingford.com/555/1/HRPP346_IMPACT_Investigation_of_extreme_flood_processes_and_uncertainty_-_a_European_research_project.pdf
- Mudashiru, R. B., Sabtu, N., Abustan, I., & Balogun, W. (2021). Flood hazard mapping methods: A review. *Journal of Hydrology*, 603(A), 126846. <https://doi.org/10.1016/j.jhydrol.2021.126846>
- Musolino, G., Ahmadian, R., & Falconer, R. A. (2020). Comparison of flood hazard assessment criteria for pedestrians with a refined mechanics-based method. *Journal of Hydrology X*, 9, 100067. <https://doi.org/10.1016/j.hydroa.2020.100067>
- Muñoz, D. F., Moftakhari, H., & Moradkhani, H. (2020). Compound effects of flood drivers and wetland elevation correction on coastal flood hazard assessment. *Water Resources Research*, 56(7), e2020WR027544. <https://doi.org/10.1029/2020WR027544>
- Naeem, B., Azmat, M., Tao, H., Ahmad, S., Khattak, M. U., Haider, S., Ahmad, S., Khero, Z., & Goodell, C. R. (2021). Flood hazard assessment for the Tori Levee breach of the Indus River basin, Pakistan. *Water*, 13(5), 604. <https://doi.org/10.3390/w13050604>
- National Research Council. (2009). *Mapping the zone: Improving flood map accuracy*. The National Academies Press. <https://doi.org/10.17226/12573>
- NDMA. (2016). *NDMA policy guidelines for conduct of multi hazard vulnerability and risk assessment (MHVRA)*. Natural Disaster Management Authority, Pakistan. <http://www.pdma.gov.pk/new/resources/mhvra2017.pdf>
- Neuhold, C., Pleschko, D., Schmid, F., Stiefelmeyer, H., & Wenk, M. (2018). *Flood risk management in Austria. Objective — Measures — Good practice*. Federal Ministry for Sustainability and Tourism, Austria. https://rainman-toolbox.eu/wp-content/uploads/2021/02/AT-HWRM_%C3%96_2018_Barrierefrei_EN.pdf
- NFIP. (2021). *Flood insurance*. U.S. National Flood Insurance Program, Federal Emergency Management Agency. <https://www.fema.gov/flood-insurance>
- Nofal, O. M., & van de Lindt, J. W. (2022). Understanding flood risk in the context of community resilience modeling for the built environment: Research needs and trends. *Sustainable and Resilient Infrastructure*, 7(3), 171–187. <https://doi.org/10.1080/23789689.2020.1722546>
- NSWG. (2005). *Floodplain development manual. The management of flood liable land*. Department of Infrastructure, Planning and Natural Resources, New South Wales Government, Australia. <https://www.environment.nsw.gov.au/-/media/OEH/Corporate-Site/Documents/Water/Floodplains/floodplain-development-manual.pdf>
- Néelz, S., & Pender, G. (2009). *Desktop review of 2D hydraulic modelling packages* (Science Report: SC080038). Environment Agency, UK. https://assets.publishing.service.gov.uk/media/603a9888fa8f543294411a8/_SC080035/Desktop_review_of_2D_hydraulic_packages_Phase_1_Report.pdf
- Olcina-Cantos, J., & Díez-Herrero, A. (2021). Technical evolution of flood maps through Spanish experience in the European framework. *The Cartographic Journal*. <https://doi.org/10.1080/0087041.2021.1930678>
- Ongdas, N., Akiyanova, F., Karakulov, Y., Muratbayeva, A., & Zinabdin, N. (2020). Application of HEC-RAS (2D) for flood hazard maps generation for Yesil (Ishim) River in Kazakhstan. *Water*, 12(10), 2672. <https://doi.org/10.3390/w12102672>
- OPW. (2022). *Plan prepare protect*. Office of Public Works, Ireland. <https://flooding.ie/>
- Padulano, R., Rianna, G., Costabile, P., Costanzo, C., Del Giudice, G., & Mercogliano, P. (2021). Propagation of variability in climate projections within urban flood modelling: A multi-purpose impact analysis. *Journal of Hydrology*, 602, 126756. <https://doi.org/10.1016/j.jhydrol.2021.126756>
- Pagneux, E., & Roberts, M. J. (2015). Öraefi district and Markarfljót outwash plain: Rating of flood hazards. In E. Pagneux, M. T. Gudmundsson, S. Karlsdóttir, & M. J. Roberts (Eds.), *Volcanogenic floods in Iceland: An assessment of hazards and risks at Öraefajökull and on the Markarfljót outwash plain* (pp. 101–122). https://www.vedur.is/gogn/vefgogn/jokulhlaup/haettumat/oraefajokull-markarfljotsaurar/bok_en/chapter_V.pdf
- Patra, J. P., Kumar, R., & Mani, P. (2019). Flood hazard assessment for a dam failure. *International Journal of Advance and Innovative Research*, 6(2), 34–39. <http://iaraedu.com/pdf/ijair-volume-6-issue-2-xxx-april-june-2019.pdf>
- Penning-Rowsell, E., Floyd, P., Ramsbottom, D., & Surendran, S. (2005). Estimating injury and loss of life in floods: A deterministic framework. *Natural Hazards*, 36(1–2), 43–64. <https://doi.org/10.1007/s11069-004-4538-7>
- Phakonkham, S., Kazama, S., & Komori, D. (2021). Integrated mapping of water-related disasters using the analytical hierarchy process under land use change and climate change issues in Laos. *Natural Hazards and Earth System Sciences*, 21(5), 1551–1567. <https://doi.org/10.5194/nhess-21-1551-2021>
- Pieterse, N., Knoop, J., Nabielek, K., Pols, L., & Tennekes J. (2009). *Overstromingsrisicozoneren in Nederland. Hoe in de ruimtelijke ordening met overstromingsrisico's kan worden omgegaan [Flood risk zoning in the Netherlands. How to deal with flood risks in spatial planning]*. PBL (Planbureau voor de Leefomgeving), Den Haag, The Netherlands (in Dutch). https://www.pbl.nl/sites/default/files/downloads/overstromingsrisicozoneren_in_nederland_webpdf.pdf
- PLUIES. (2003). *Méthodologie de détermination des zones d'inondation [Methodology for determining flood zones]*. Prévention et Lutte contre les Inondations et leurs Effets sur les Sinistrés [Flood prevention and control and effects of floods on victims].

- Government of Wallonia, Belgium (in French). http://environnement.wallonie.be/de/dcenn/plan_pluies/methodologie.htm
- Po River Basin Authority. (1999). *Progetto di piano stralcio per l'assetto idrogeologico — Norme di attuazione, Norme per le fasce fluviali [Project of the extract plan for the hydrogeological asset — Guidelines for the identification of river zones]*. Po River Basin Authority, Italy (in Italian). http://www.adbpo.it/download/MorfologiaFluviale/psff_pai/8702All-3_tit_II-Metodo_di_delimit_fasce_fluviali.pdf
- Priest, S., Tapsell, S., Penning-Rowsell, E., Viaattene, C., & Wilson, T. (2009). *Building models to estimate loss of life for flood events. Executive summary* (Report no. T10-08-10). FLOODsite. http://www.floodsite.net/html/partner_area/project_docs/T10_08_10_Risk_to_Life_ExecSum_V1_3_P01.pdf
- Prinos, P. (2008). *Review of flood hazard mapping* (Report no. T03-07-01). FLOODsite. http://www.floodsite.net/html/partner_area/project_docs/T03_07_01_Review_Hazard_Mapping_V4_3_P01.pdf
- Psomiadis, E., Tomanis, L., Kavvadias, A., Soulis, K. X., Charizopoulos, N., & Michas, S. (2021). Potential dam breach analysis and flood wave risk assessment using HEC-RAS and remote sensing data: A multicriteria approach. *Water*, 13(3), 364. <https://doi.org/10.3390/w13030364>
- Quiroga, V. M., Kure, S., Udo, K., & Mano, A. (2016). Application of 2D numerical simulation for the analysis of the February 2014 Bolivian Amazonia flood: Application of the new HEC-RAS version 5. *Ribagua*, 3(1), 25–33. <https://doi.org/10.1016/j.riba.2015.12.001>
- Raetzo, H., Lateltin, O., Bollinger, D., & Tripet, J. (2002). Hazard assessment in Switzerland — Codes of practice for mass movements. *Bulletin of Engineering Geology and the Environment*, 61(3), 263–268. <https://doi.org/10.1007/s10064-002-0163-4>
- Ranzi, R., Mazzoleni, M., Milanesi, L., Pilotti, M., Ferri, M., Giuriato, F., Gero, M., Fewtrell, T., Bates, P., Neal, J., Di Baldassarre, G., Bogaard, T., Brilly, M., & Mikoš, M. (2011). *Critical review of non-structural measures for water-related risks*. KULTURISK, FP7-ENV-2010, Project 265280. https://www.researchgate.net/profile/Mikos-Matjaz/publication/269219611_Critical_review_of_non-structural_measures_for_water-related_risks/links/54842c0f0cf2e5f7ceaccb2a/Critical-review-of-non-structural-measures-for-water-related-risks.pdf
- Rickenmann, D. (2005). *Hangmuren und Gefahrenbeurteilung. Kurzbericht für das Bundesamt für Wasser und Geologie [Debris flow and risk assessment. Short report for the Federal Office for Water and Geology]*. Unpublished report, Universität für Bodenkultur, Wien, und Eidg. Forschungsanstalt WSL, Birmensdorf, Switzerland.
- Rosser, J. F., Leibovici, D. G., & Jackson, M. J. (2017). Rapid flood inundation mapping using social media, remote sensing and topographic data. *Natural Hazards*, 87(1), 103–120. <https://doi.org/10.1007/s11069-017-2755-0>
- Rufat, S., Tate, E., Burton, C. G., & Maroof, A. S. (2015). Social vulnerability to floods: Review of case studies and implications for measurement. *International Journal of Disaster Risk Reduction*, 14(4), 470–486. <https://doi.org/10.1016/j.ijdrr.2015.09.013>
- Russo, B., Gómez, M., & Macchione, F. (2013). Pedestrian hazard criteria for flooded urban areas. *Natural Hazards*, 69(1), 251–265. <https://doi.org/10.1007/s11069-013-0702-2>
- Samuels, P., Klijn, F., Kortenhaus, A., & Sayers, P. (2009). *FLOODsite final report. Volume 1: Advancement in knowledge and understanding* (Report no. T35-09-01). FLOODsite. https://www.floodsite.net/html/partner_area/project_docs/T35_09_01_FLOODsite_ISAR_Volume_1_V2_0_P01.pdf
- Sanders, B. F., Schubert, J. E., Goodrich, K. A., Houston, D., Feldman, D. L., Basolo, V., Luke, A., Boudreau, D., Karlin, B., Cheung, W., Contreras, S., Reyes, A., Eguiarte, A., Serrano, K., Alaire, M., Moftakhar, H., AghaKouchak, A., & Matthew, R. A. (2020). Collaborative modeling with fine-resolution data enhances flood awareness, minimizes differences in flood perception, and produces actionable flood maps. *Earth's Future*, 8(1), e2019EF001391. <https://doi.org/10.1029/2019EF001391>
- Santillan, J. R., Marqueso, J. T., Makinano-Santillan, M., & Serviano, J. L. (2016). Beyond flood hazard maps: Detailed flood characterization with remote sensing, GIS and 2D modelling. *International Archives of the Photogrammetry, Remote Sensing and Spatial Information Sciences*, XLII-4/W1, 315–323. <https://doi.org/10.5194/isprs-archives-XLII-4-W1-315-2016>
- Sayers, P., Li, Y., Galloway, G., Penning-Rowsell, E., Shen, F., Wen, K., Chen, Y., & Le Quesne, T. (2013). *Flood risk management: A strategic approach*. UNESCO. <https://www.adb.org/sites/default/files/publication/30246/flood-risk-management.pdf>
- Shah, S. M. H., Mustaffa, Z., Martínez-Gomariz, E., Yusof, K. W., & Al-Qadami, E. H. H. (2021). A review of safety guidelines for vehicles in floodwaters. *International Journal of River Basin Management*, 19(1), 25–41. <https://doi.org/10.1080/15715124.2019.1687487>
- Shand, T. D., Cox, R. J., Blacka, M. J., & Smith, G. P. (2011). *Australian rainfall and runoff. Revision Project 10: Appropriate safety criteria for vehicles — Literature review* (Report P10/S2/006). Water Research Laboratory, University of New South Wales, Australia. http://arr.ga.gov.au/_data/assets/pdf_file/0004/40486/ARR_Project_10_Stage2_Report_Final.pdf
- Shrestha, S., & Lohpaisankrit, W. (2017). Flood hazard assessment under climate change scenarios in the Yang River Basin, Thailand. *International Journal of Sustainable Built Environment*, 6(2), 285–298. <https://doi.org/10.1016/j.ijsbe.2016.09.006>
- Sicilian Region. (2004). *Piano stralcio di bacino per l'assetto idrogeologico della Regione Siciliana — Relazione generale [Basin extract plan for the hydrogeological asset of the Sicilian Region — General report]*. Sicilian Region, Italy (in Italian). https://www.sitr.regione.sicilia.it/pai/CD_PA1/UNITA_09/09_PDF/Testi/RELAZIONEGENERALEP.A.I.pdf
- Silvestro, F., Rebora, N., Rossi, L., Dolia, D., Gabellani, S., Pignone, F., Trasforini, E., Rudari, R., De Angeli, S., & Masciulli, C. (2016). What if the 25 October 2011 event that struck Cinque Terre (Liguria) had happened in Genoa, Italy? Flooding scenarios, hazard mapping and damage estimation. *Natural Hazards and Earth System Sciences*, 16(8), 1737–1753. <https://doi.org/10.5194/nhess-16-1737-2016>
- Skilodimou, H. D., Bathrellos, G. D., & Alexakis, D. E. (2021). Flood hazard assessment mapping in burned and urban areas. *Sustainability*, 13(8), 4455. <https://doi.org/10.3390-su13084455>
- Skougaard Kaspersen, P., Høegh Ravn, N., Arnbjerg-Nielsen, K., Madsen, H., & Drews, M. (2017). Comparison of the impacts of urban development and climate change on exposing European cities to pluvial flooding. *Hydrology and Earth System Sciences*, 21(8), 4131–4147. <https://doi.org/10.5194/hess-21-4131-2017>
- Smith, G. P., Davey, E. K., & Cox, R. J. (2014). *Flood hazard* (WRL Technical Report 2014/07). Water Research Laboratory, University of New South Wales, Australia. <https://knowledge.aird.org.au/media/2334/wrl-flood-hazard-technical-report-september-2014.pdf>

- Stephenson, D. (2002). Integrated flood plain management strategy for the Vaal. *Urban Water*, 4(4), 423–428. [https://doi.org/10.1016/S1462-0758\(02\)00032-8](https://doi.org/10.1016/S1462-0758(02)00032-8)
- Tansar, H., Babur, M., & Karnchanapaiboon, S. L. (2020). Flood inundation modeling and hazard assessment in Lower Ping River Basin using MIKE FLOOD. *Arabian Journal of Geosciences*, 13(18), 934. <https://doi.org/10.1007/s12517-020-05891-w>
- Teng, J., Jakeman, A. J., Vaze, J., Croke, B. F. W., Dutta, D., & Kim, S. (2017). Flood inundation modelling: A review of methods, recent advances and uncertainty analysis. *Environmental Modelling & Software*, 90, 201–216. <https://doi.org/10.1016/j.envsoft.2017.01.006>
- The Mekong River Commission Secretariat. (2009). *Best practice guidelines for flood risk assessment*. The Flood Management and Mitigation Programme. Component 2: Structural Measures & Flood Proofing in the Lower Mekong Basin. https://www.preventionweb.net/files/15958_mrcbestpractiseguidelinesforfloodri.pdf
- Tingsanchali, T., & Karim, F. (2010). Flood-hazard assessment and risk-based zoning of a tropical flood plain: Case study of the Yom River, Thailand. *Hydrological Sciences Journal*, 55(2), 145–161. <https://doi.org/10.1080/0262660903545987>
- Tingsanchali, T., & Karim, M. F. (2005). Flood hazard and risk analysis in the southwest region of Bangladesh. *Hydrological Processes*, 19(10), 2055–2069. <https://doi.org/10.1002/hyp.5666>
- Tingsanchali, T., & Promping, T. (2022). Comprehensive assessment of flood hazard, vulnerability, and flood risk at the household level in a municipality area: A case study of Nan Province, Thailand. *Water*, 14(2), 161. <https://doi.org/10.3390/w14020161>
- Toosi, A. S., Calbimonte, G. H., Nouri, H., & Alaghmand, S. (2019). River basin-scale flood hazard assessment using a modified multi-criteria decision analysis approach: A case study. *Journal of Hydrology*, 574, 660–671. <https://doi.org/10.1016/j.jhydrol.2019.04.072>
- Toosi, A. S., Doulabian, S., Tousi, E. G., Calbimonte, G. H., & Alaghmand, S. (2020). Large-scale flood hazard assessment under climate change: A case study. *Ecological Engineering*, 147, 105765. <https://doi.org/10.1016/j.ecoleng.2020.105765>
- Tsakiris, G. (2014). Flood risk assessment: Concepts, modelling, applications. *Natural Hazards and Earth System Sciences*, 14(5), 1361–1369. <https://doi.org/10.5194/nhess-14-1361-2014>
- Țincu, R., Zézere, J. L., & Lazar, G. (2018). Identification of elements exposed to flood hazard in a section of Trotus River, Romania. *Geomatics, Natural Hazards and Risk*, 9(1), 950–969. <https://doi.org/10.1080/19475705.2018.1486891>
- UCI. (2022). *FloodRISE*. UCI Blum Center for Poverty Alleviation, Division of Flooding and Poverty. University of California, Irvine, CA. <https://blumcenter.uci.edu/flood/floodrise/>
- Udmale, P., Tachikawa, Y., Kobayashi, K., & Sayama, T. (2019). Flood hazard mapping in Japan. In K. Kobayashi, I. D. A. Sutapa, G. Q. Tabios III, Y. Tachikawa, & H. D. Thulstrup (Eds.), *Catalogue of hydrologic analysis for Asia and the Pacific. Flood hazard mapping*. (Vol. 1, pp. 17–37). The UNESCO-IHP Regional Steering Committee for Asia and the Pacific. http://hywr.kuciv.kyoto-u.ac.jp/ihp/cha/vol1/Japan_Flood_Hazard_Mapping.pdf
- UmweltAtlas. (2022). *Informationen zu überschwemmungsgefährdeten Gebieten im UmweltAtlas Bayern [Information on areas at risk of flooding in the Bavarian Environmental Atlas]*. Bavarian Environment Agency, Germany. https://www.umweltatlas.bayern.de/mapapps/resources/apps/lfu_naturgefahren_ftz/index.html?lang=de&stateId=f4c9e540-f048-49ac-89e5-40f048a9acaa
- UP DREAM. (2016). *The UP DREAM program (Disaster risk and exposure assessment for mitigation)*. University of the Philippines. <https://dream.upd.edu.ph/index.html>
- USACE. (1995). *Flood proofing regulations* (EP 1165-2-314). U.S. Army Corps of Engineers, Washington, DC. https://www.publications.usace.army.mil/Portals/76/Publications/Engineer_Pamphlets/EP_1165-2-314.pdf
- van Alphen, J., & Passchier, R. (2007). *Atlas of flood maps. Examples from 19 European countries, USA and Japan*. Ministry of Transport, Public Works and Water Management, The Netherlands. https://ec.europa.eu/environment/water/flood_risk/flood_atlas/
- van Alphen, J., Martini, F., Loat, R., Slomp, R., & Passchier, R. (2009). Flood risk mapping in Europe, experiences and best practices. *Journal of Flood Risk Management*, 2(4), 285–292. <https://doi.org/10.1111/j.1753-318X.2009.01045.x>
- Vojtek, M., & Vojteková, J. (2016). Flood hazard and flood risk assessment at the local spatial scale: A case study. *Geomatics, Natural Hazards and Risk*, 7(6), 1973–1992. <https://doi.org/10.1080/19475705.2016.1166874>
- Vorogushyn, S., Merz, B., Lindenschmidt, K.-E., & Apel, H. (2010). A new methodology for flood hazard assessment considering dike breaches. *Water Resources Research*, 46(8), W08541. <https://doi.org/10.1029/2009WR008475>
- Vu, T. T., & Ranzi, R. (2017). Flood risk assessment and coping capacity of floods in central Vietnam. *Journal of Hydro-environment Research*, 14, 44–60. <https://doi.org/10.1016/j.jher.2016.06.001>
- Wade, S., Ramsbottom, D., Floyd, P., Penning-Roselli, E., & Surendran, S. (2005). Risks to people: Developing new approaches for flood hazard and vulnerability mapping. *Proceedings of the 40th DEFRA Flood and Coastal Management Conference*. HR Wallingford, UK. https://eprints.hrwallingford.com/562/1/HRPP340-Risks_to_people-Flood_hazard_approaches.pdf
- Werren, G., Reynard, E., Lane, S. N., & Balin, D. (2016). Flood hazard assessment and mapping in semi-arid piedmont areas: A case study in Beni Mellal, Morocco. *Natural Hazards*, 81(1), 481–511. <https://doi.org/10.1007/s11069-015-2092-0>
- Xia, J., Falconer, R. A., Lin, B., & Tan, G. (2011). Numerical assessment of flood hazard risk to people and vehicles in flash floods. *Environmental Modelling & Software*, 26(8), 987–998. <https://doi.org/10.1016/j.envsoft.2011.02.017>
- Xia, J., Falconer, R. A., Wang, Y., & Xiao, X. (2014). New criterion for the stability of a human body in floodwaters. *Journal of Hydraulic Research*, 52(1), 93–104. <https://doi.org/10.1080/00221686.2013.875073>

How to cite this article: Maranzoni, A., D’Oria, M., & Rizzo, C. (2023). Quantitative flood hazard assessment methods: A review. *Journal of Flood Risk Management*, 16(1), e12855. <https://doi.org/10.1111/jfr3.12855>